

WAAS CH 61316 W19A	APP CRS 188°	Rwy Idg TDZE 961 Apt Elev 969
--	------------------------	---

RNAV (GPS) RWY 19
LAFAYETTE MUNI (3M7)

RNP APCH - GPS

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 46°C.
▲ NA Obtain local altimeter setting on CTAF; when not received, use Bowling Green altimeter setting: increase LPV DA to 1344 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 1502 feet and all visibilities ½ SM; increase all MDAs 140 feet and visibility LNAV Cat C ¼ SM, Cat D ½ SM, and Circling Cat C and D ½ SM. Rwy 19 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH:
Climb to 3000 direct
HETAP and hold.

NASHVILLE APP CON
118.4 360.7

UNICOM
122.8 (CTAF)

MSA RW19 25 NM

3100



(IAF) FUPU
2900 NoPT
188° (6.6)

4 NM
008°
188°
(IF/IAF) OZESI

2500
188°
(6.1)

(FAF) QALAY
1129
OLLW 1.8 NM to RW19

1140
1099±
1132±
1342


HETAP
2900 to OZESI
008° (23.5)

▲ 1430

MISSED APCH FIX
HETAP




ELEV 969 D TDZE 961

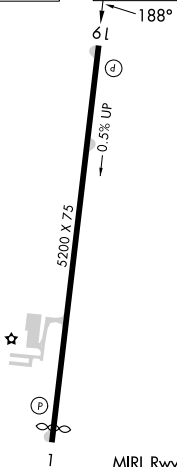

MIRL Rwy 1-19
REIL Rws 1 and 19

3000 HETAP VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).

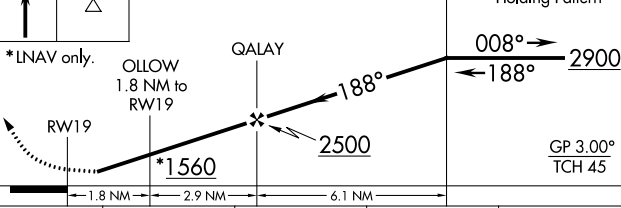

CATEGORY	A	B	C	D
LPV DA	1211-1	250 (300-1)		
LNAV/VNAV DA	1369-1½	408 (400-1½)		
LNAV MDA	1380-1	419 (500-1)	1380-1¼	419 (500-1¼)
CIRCLING	1440-1	471 (500-1)	1600-1¾ 631 (700-1¾)	1700-2¼ 731 (800-2¼)