



WAAS CH 63034 W19A	APP CRS 191°	Rwy Idg 3992 TDZE 19 Apt Elev 19
--	------------------------	---

RNAV (GPS) RWY 19

POINT HOPE (PHO) (PAPO)

▼ ▲ NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). When local altimeter setting not received, procedure NA. DME/DME RNP-0.3 NA.	MISSED APPROACH: Climb to 700 then climbing left turn to 2800 direct FENOM and hold.
--	--

AWOS-3P 118.325	ANCHORAGE CENTER 119.65 363.25	KOTZEBUE RADIO 122.25	CTAF 122.8 0
---------------------------	--	---------------------------------	------------------------

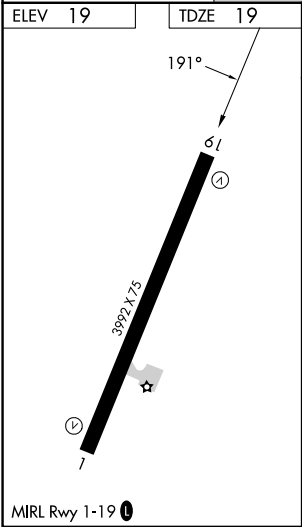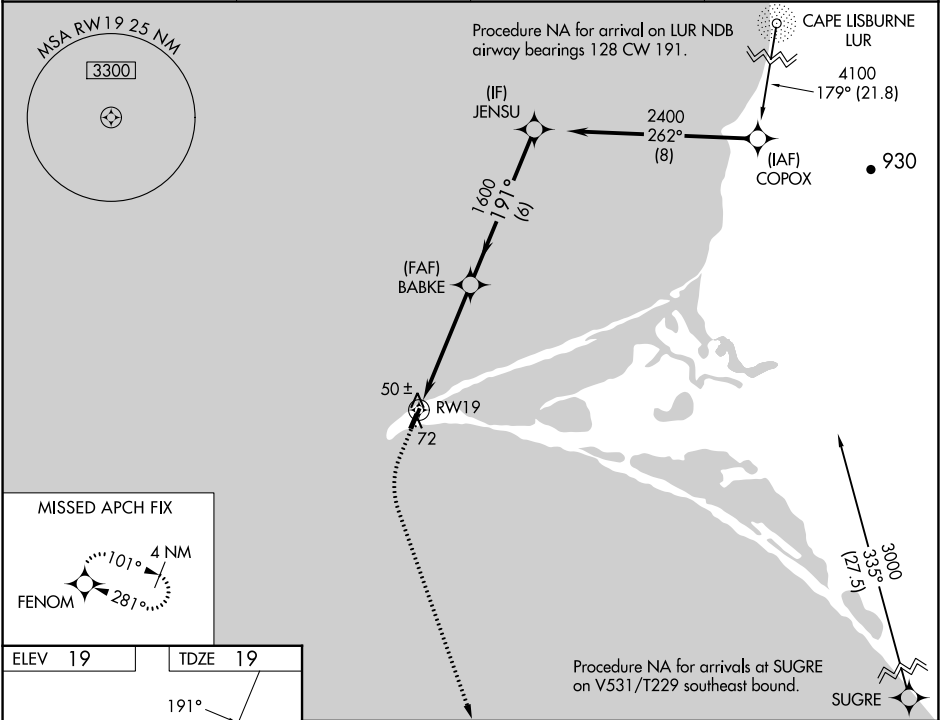

ELEV 19	TDZE 19	MIRL Rwy 1-19 0			
700	2800	FENOM	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00°/TCH 27°).		
*LNAV only		*0.9 NM to RW19	JENSU		
RW19		BABKE	2400		
0.9 NM		1600	191°		
3.9 NM		1600	GP 3.00° TCH 40		
6 NM					
CATEGORY	A	B	C	D	
LPV DA	269-1 250 (300-1)				
LNAV/VNAV DA	269-1 250 (300-1)				
LNAV MDA	360-1 341 (400-1)				
CIRCLING	380-1 361 (400-1)	480-1 461 (500-1)	480-1½ 461 (500-1½)	580-2 561 (600-2)	