

WAAS CH 93838 W27A	APP CRS 270°	Rwy Idg TDZE 1240 Apt Elev 1243	4043
--	------------------------	---	-------------

RNAV (GPS) RWY 27

CUMBERLAND MUNI (UBE)


▼

▲


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Rice Lake altimeter setting. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Rice Lake altimeter setting; increase LPV DA to 1533 feet and LNAV/VNAV DA to 1549 feet and all MDA 60 feet; increase LPV all Cats visibility and LNAV Cat C/D visibility ½ mile; increase Circling Cat D visibility ¼ mile.

MISSED APPROACH:
Climb to 3400 direct
DESTE and hold.

AWOS-3PT 119.175	MINNEAPOLIS CENTER 125.3 335.6	GCO 121.725	UNICOM 122.8 (CTAF) 0
----------------------------	--	-----------------------	---------------------------------

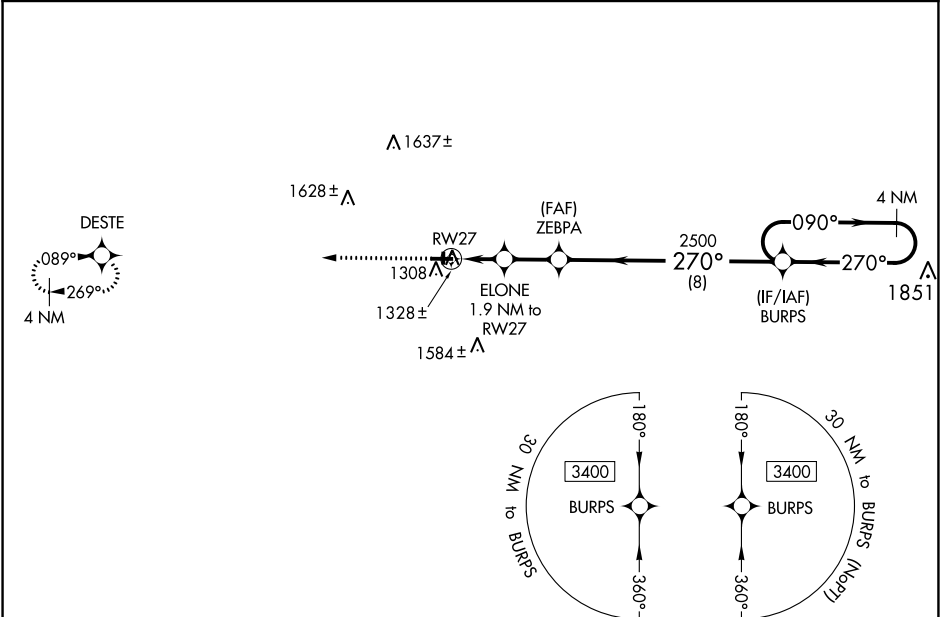

ELEV 1243	TDZE 1240
-----------	-----------

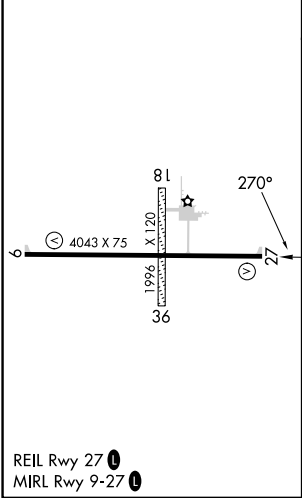

3400

DESTE

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 29).

4 NM
Holding Pattern

*LNAV only

ELONE
1.9 NM to
RW27

ZEBPA
2500

BURPS

090°→
←270°

3400

GP 3.00°
TCH 40

1 NM

0.9 NM

2 NM

8 NM

CATEGORY	A	B	C	D
LPV DA		1490-1	250 (300-1)	
LNAV/VNAV DA		1506-1	266 (300-1)	
LNAV MDA		1580-1	340 (400-1)	
CIRCLING	1640-1 397 (400-1)	1940-1 697 (700-1)	1940-2 697 (700-2)	1980-2 ¼ 737 (800-2 ¼)