

APP CRS
012°

Rwy Idg
3700

TDZE
80

Apt Elev
80

RNAV (GPS) RWY 1

LAKE CITY MUNI CJ EVANS FLD (51J)


NA

NA

DME/DME RNP-0.3 NA. Straight-in minimums NA at night.
Use Kingstree altimeter setting, when not received, use Florence altimeter setting and increase all MDAs 40 feet, increase Circling Cats B/C visibility ¼ SM. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 2000 direct INECA and hold.

CKI AWOS-3 124.775	FLORENCE APP CON ★ 135.25 316.15	CTAF 122.9 0
------------------------------	--	------------------------

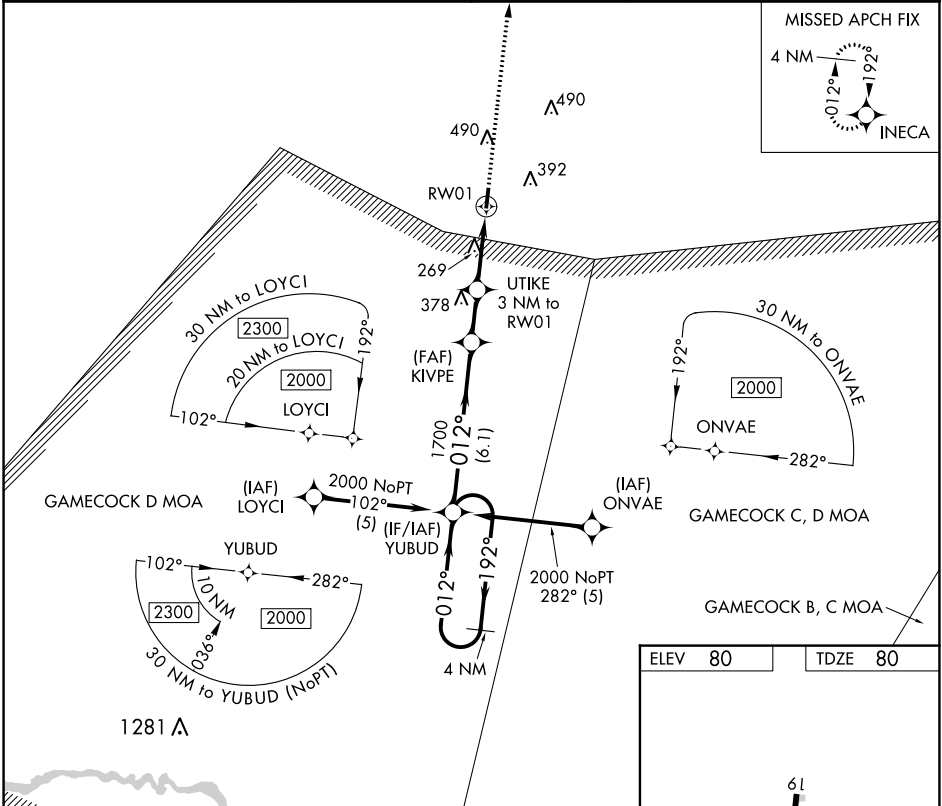

4 NM Holding Pattern YUBUD

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 25).

2000 INECA

2000

192°

012°

012°

1700

3.04° TCH 40

UTIKE 3 NM to RW01

RW01

6.1 NM

1.9 NM

3 NM

CATEGORY	A	B	C	D
LNNAV MDA	560-1	480 (500-1)	560-1¼ 480 (500-1¼)	NA
CIRCLING	660-1 580 (600-1)	880-1 800 (800-1)	880-2¼ 800 (800-2¼)	NA

61

144

3700 X 75

012° to RW01

MIRL Rwy 1-19 0