

APP CRS
192°

Rwy Idg **3700**
TDZE **80**
Apt Elev **80**

RNAV (GPS) RWY 19

LAKE CITY MUNI CJ EVANS FLD (51J)


⚠

NA

Rwy 19 helicopter visibility reduction below 1 SM NA. DME/DME RNP-0.3 NA.
Use Kingstree altimeter setting, when not received, use Florence altimeter setting and increase all MDAs 40 feet, increase LNAV Cat B visibility ¼ SM and Cat C visibility ½ SM, increase Circling Cats B/C visibility ¼ SM. Straight-in Rwy 19 NA at night.

MISSED APPROACH: Climb to 2000 direct YUBUD and hold.

CKI AWOS-3 124.775	FLORENCE APP CON★ 135.25 316.15	CTAF 122.9
------------------------------	---	----------------------

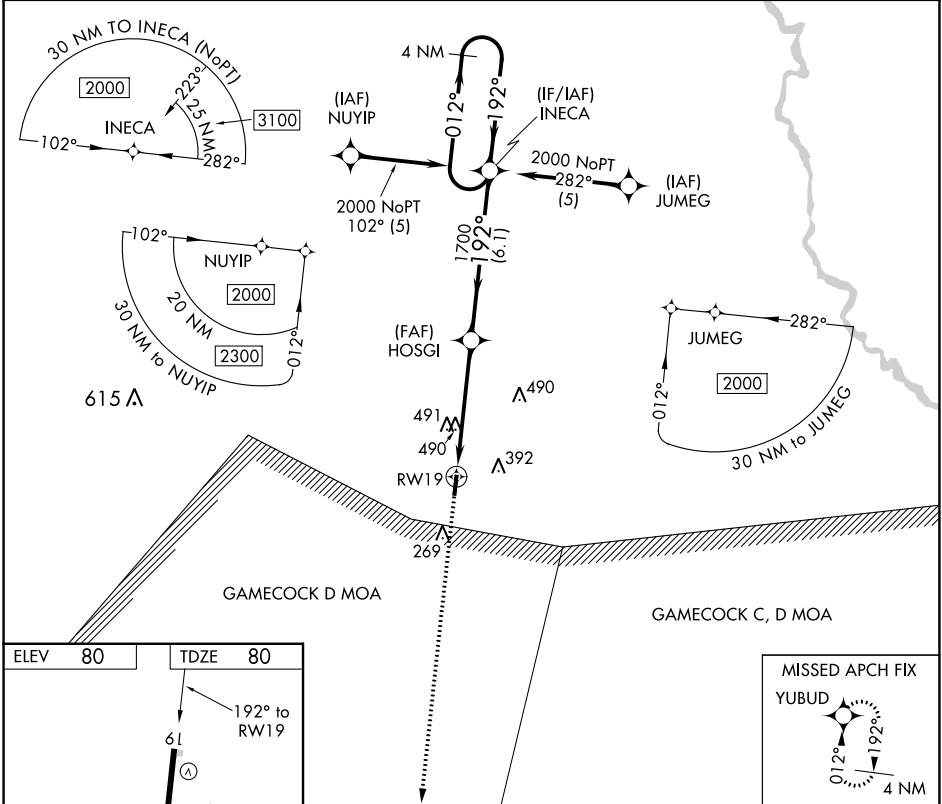

ELEV 80

TDZE 80

192° to RWY 19

61

3700 X 75

144

MIRL Rwy 1-19

1

MISSED APCH FIX

YUBUD

012°

192°

4 NM

Visual Segment - Obstacles.

HOSGI

INECA Holding Pattern

4 NM

012°

192°

2000

4.9 NM

6.1 NM

CATEGORY	A	B	C	D
LNAV MDA	820-1 740 (800-1)	820-2 740 (800-2)	820-2 740 (800-2)	NA
CIRCLING	820-1 740 (800-1)	880-1 800 (800-1)	880-2 ¼ 800 (800-2 ¼)	NA