

WAAS CH 69536 W22A	APP CRS 218°	Rwy ldg TDZE Apt Elev	3700 354 354
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 22

WASILLA (IYS) (PAWS)

RNP APCH.


▼

⚠

Circling NA to Rwy 4S and 22S. Baro-VNAV and VDP NA when using Palmer altimeter setting. Rwy 22 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 54°C. When local altimeter setting not received, use Palmer altimeter setting and increase all DA 46 feet, MDA 60 feet and all visibilities ½ mile.

MISSED APPROACH:
Climb to 1000 then
climbing right turn to
3000 direct BQG
VORTAC and hold.

AWOS-3P 135.25	ANCHORAGE APP CON 119.1 363.2	CTAF 122.8 0
--------------------------	---	------------------------

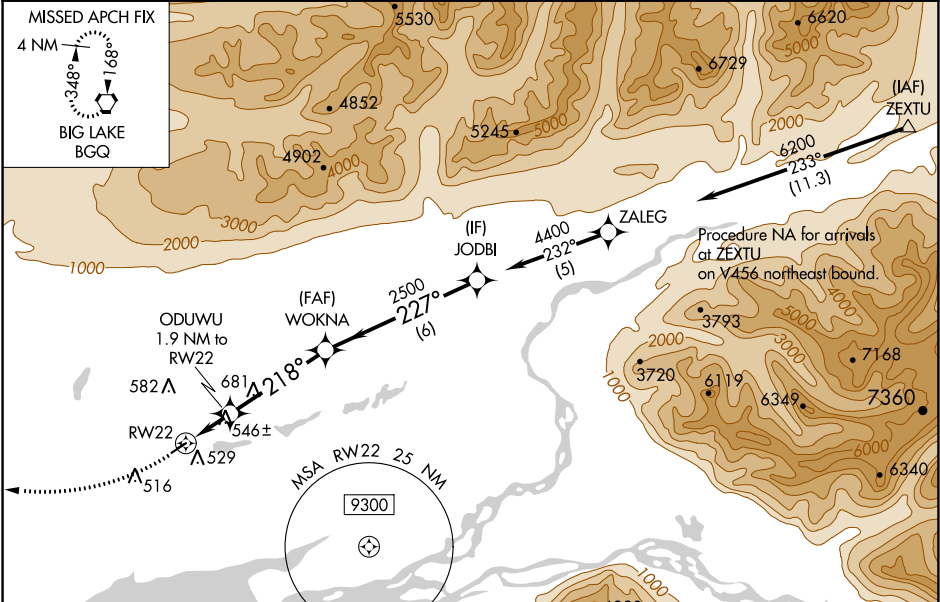

ELEV 354 TDZE 354

1000 3000 BQG

*LNAV only

ODUWU 1.9 NM to RW22

*1.2 NM to RW22

WOKNA 2500

JODBI 4400

GP 3.31° TCH 40

218° to RW22

227°

218°

227°

1060*

1.2 NM 0.7 NM 4.1 NM 6 NM

CATEGORY	A	B	C	D
LPV DA	604-¾	250 (300-¾)	NA	NA
LNAV/VNAV DA	821-1½	467 (500-1½)	NA	NA
LNAV MDA	800-1	446 (500-1)	NA	NA
CIRCLING	1000-1	646 (700-1)	NA	NA

MIRL Rwy 4-22
REIL Rwy 4 and 22