

WAAS CH 53636 W04A	APP CRS 038°	Rwy Idg TDZE Apt Elev	3700 352 354
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4

WASILLA (IYS) (PAWS)

RNP APCH


▼

▲

Circling NA to Rwy 4S and 22S. Baro-VNAV and VDP NA when using Palmer altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. When local altimeter setting not received, use Palmer altimeter setting and increase all DA 46 feet, all MDA 60 feet and all visibilities ¼ mile.

MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct BGQ VORTAC and hold.

AWOS-3P 135.25	ANCHORAGE APP CON 119.1 363.2	CTAF 122.8 0
--------------------------	---	------------------------

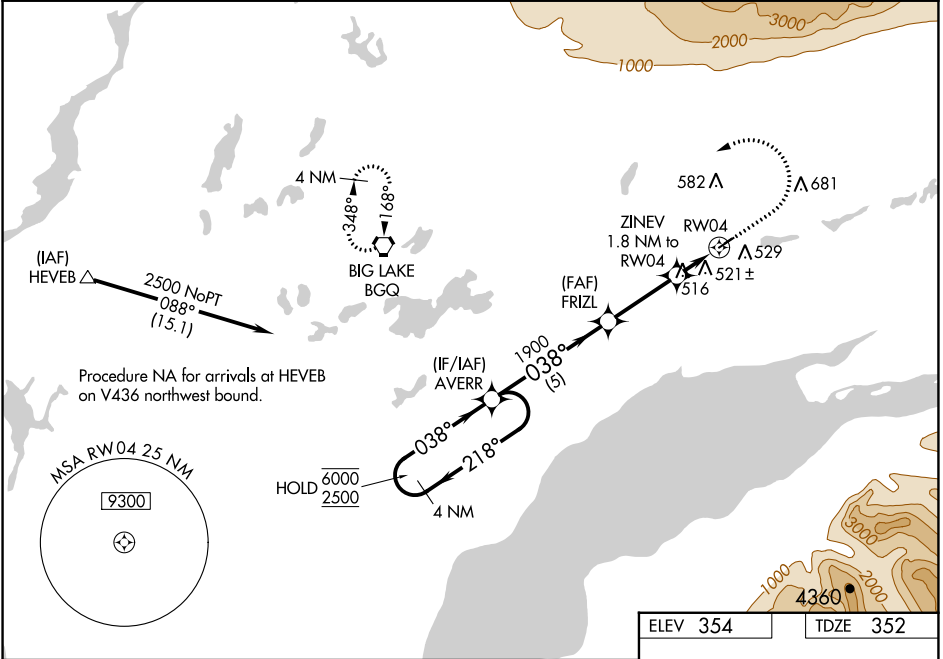

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).		1000	3000	BGQ
6000 ← 218°		AVERR		*LNAV only.		
2500 → 038°		FRIZL		*1.3 NM to RWY 04		
GP 3.00°		1900		RWY 04		
TCH 45		*960		22S		
5 NM		3 NM		0.5 NM		
CATEGORY		A		B		
LPV DA		602-¾		250 (300-¾)		
LNAV/VNAV DA		828-1⅝		476 (500-1⅝)		
LNAV MDA		780-1		428 (500-1)		
CIRCLING		1000-1		646 (700-1)		

