

WAAS CH 63221 W17A	APP CRS 168°	Rwy Idg 6300 TDZE 5005 Apt Elev 5022
--	------------------------	---

RNAV (GPS) RWY 17

NEPHI MUNI (U14)

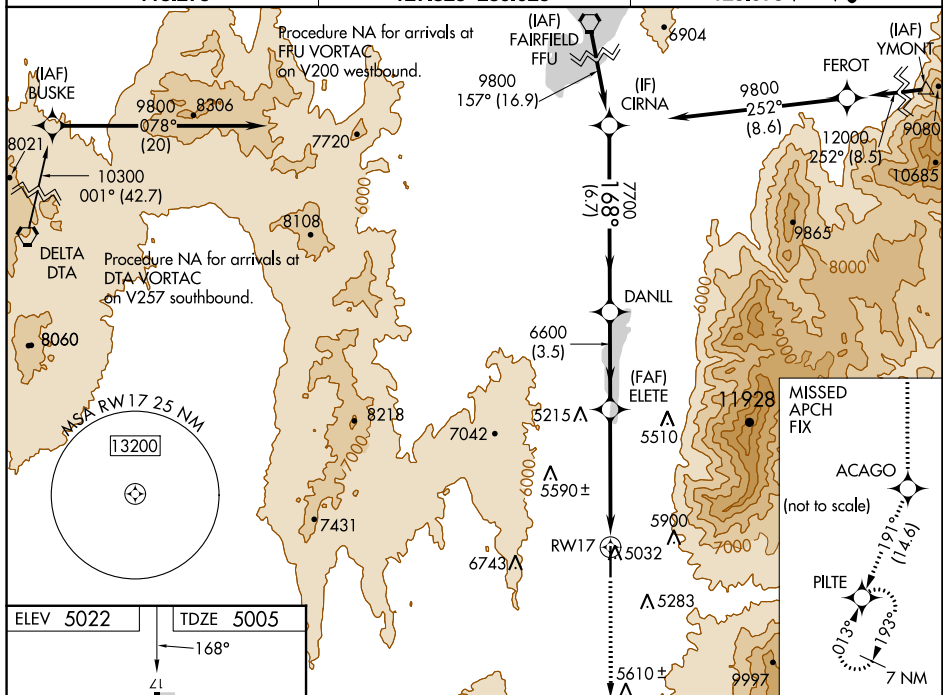
RNP APCH - GPS.	
-----------------	--

T Baro-VNAV NA when using Provo Muni altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 12°C. When local altimeter setting not received, use Provo altimeter setting: increase LPV DA to 5577 feet and visibility all Cats ½ SM, increase LNAV/VNAV DA to 5836 feet and visibility all Cats ½ SM; increase all MDA 160 feet and LNAV and Circling visibilities Cats A/B ½ SM. Circling Cat C NA. VDP NA with Provo Muni altimeter setting.

MISSED APPROACH:
Climb to 11 400 direct
ACAGO and on track
191° to PILTE and hold.

AWOS-3
118.275

SALT LAKE CENTER
127.825 239.025

UNICOM
123.075 (CTAF) **L**

SW-4, 18 APR 2024 to 16 MAY 2024

11400 ↑	ACAGO ✱	tr 191° ✱				
*LNAV only.			*2.4 NM to RW17			
			6600	7700	168°	9800
			2.4 NM	2.5 NM	3.5 NM	6.7 NM
CATEGORY		A	B	C	D	
LPV	DA	5433-1½		428 (400-1½)		
LNAV/ VNAV	DA	5692-2½		687 (700-2½)		
LNAV	MDA	5800-1 795 (800-1)	5800-1¼ 795 (800-1¼)	5800-2½ 795 (800-2½)		
CIRCLING		5800-1 778 (800-1)	5800-1¼ 778 (800-1¼)	6920-3 1898 (1900-3)		NA