


APP CRS	Rwy Idg	4000
031°	TDZE	648
	Apt Elev	658

RNAV (GPS) RWY 3
RUBY (RBY) (PARY)

When local altimeter setting not received, use Galena altimeter setting and increase all MDA 340 feet and all visibilities ¾ SM. DME/DME RNP-0.3 NA. Rwy 3 Straight-in and Circling minimums NA at night. Helicopter visibility reduction below 1 SM NA.	MISSED APPROACH: Climbing right turn to 3800 direct WINUR and hold.
---	--

AWOS-3P 118.25	ANCHORAGE CENTER 127.0 290.2	FAIRBANKS RADIO 122.25	CTAF 122.8
-------------------	---------------------------------	---------------------------	---------------

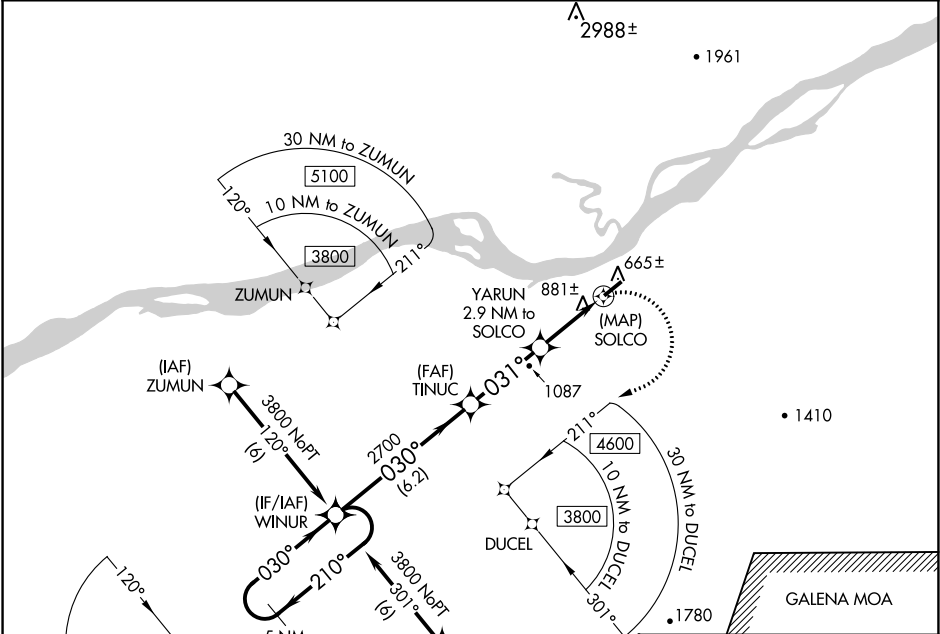

WINUR

3.0 NM to WINUR (NoPT)

3800

301°

5 NM

(IAF) DUCEL

5 NM Holding Pattern

WINUR

Visual Segment - Obstacles.

3800

WINUR

5 NM

210°

030°

030°

2700

031°

1800

SOLCO

0.1

6.2 NM

3.2 NM

2.9 NM

TINUC

YARUN 2.9 NM to SOLCO

(IAF) DUCEL

CATEGORY	A	B	C	D
LNAV MDA	1260-1	612 (700-1)	1260-1¾ 612 (700-1¾)	NA
CIRCLING	1260-1 602 (700-1)	1400-1 742 (800-1)	1400-2¼ 742 (800-2¼)	NA

ELEV 658

TDZE 648

4000 X 100

0.28% UP

031° to SOLCO

REIL Rwy 21

MIRL Rwy 3-21

(IAF) DUCEL

RNAV (GPS) RWY 3