

LOC I-AIW	APP CRS	Rwy Idg	9002
108.9	309°	TDZE	733
		Apt Elev	777


ILS or LOC RWY 31
ARDMORE MUNI (ADM)

- T** Autopilot coupled approach NA below 1360. Inop table does not apply to S-ILS 31 all Cats, S-LOC 31 Cats A and B, and UMEHU fix minimums S-LOC 31 Cats A and B. For inop ALS, increase UMEHU fix minimums S-LOC 31 Cats C and D visibility to 1 SM.


MALSR

MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 direct ADM VORTAC and hold.

ATIS 125.6	FORT WORTH CENTER 124.75 323.0	ARDMORE TOWER ★ 118.5 (CTAF) 0 257.7	GND CON 121.8	UNICOM 122.95
----------------------	--	--	-------------------------	-------------------------

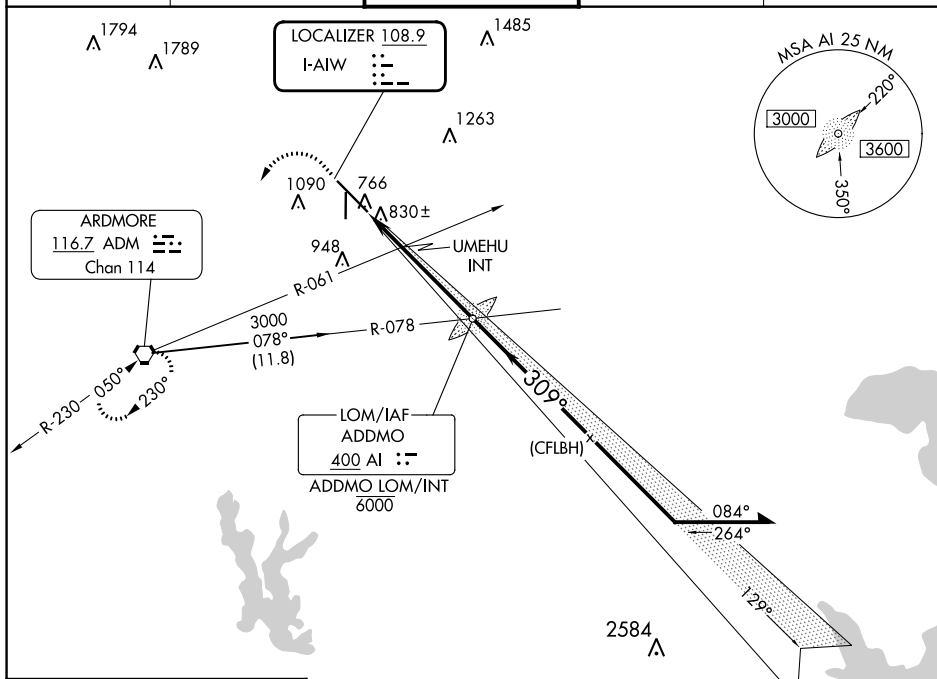

ELEV 777	D	TDZE 733
----------	----------	----------

HIRL Rwy 13-31 **L**


MIRL Rwy 17-35

FAF to MAP 5.4 NM

Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

ARDMORE, OKLAHOMA
Amdt 6 21MAR24

2000	3000	ADM	*1320 when using Ardmore Downtown Executive altimeter setting.
------	------	-----	--

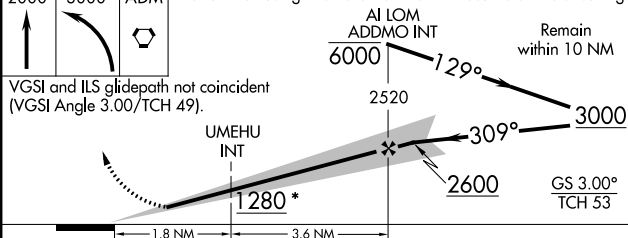

CATEGORY	A	B	C	D
S-ILS 31	936-½		203 (200-½)	
S-LOC 31*	1280-½	547 (600-½)	1280-1⅞	547 (600-1⅞)
CIRCLING	1300-1 523 (600-1)	1440-1 663 (700-1)	1500-2 723 (800-2)	1700-3 923 (1000-3)
UMEHU FIX MINIMUMS (DUAL RECEIVERS REQUIRED)				
S-LOC 31	1080-½	347 (400-½)	1080-¾	347 (400-¾)
CIRCLING	1300-1 523 (600-1)	1440-1 663 (700-1)	1500-2 723 (800-2)	1700-3 923 (1000-3)

34°18'N-97°01'W

ARDMORE MUNI (ADM)

ILS or LOC RWY 31