

WAAS CH 86530 W35B	APP CRS 356°	Rwy Idg TDZE 36 Apt Elev 36
--	------------------------	---


RNAV (GPS) Y RWY 35L

VALLEY INTL (HRL)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Port Isabel altimeter setting: increase LPV DA to 328 feet and all visibilities 1⁄8 SM; increase LNAV/VNAV DA to 418 feet and all visibilities 1⁄8 SM; increase all MDAs 60 feet and visibility Cats C and D 1⁄4 SM. Baro-VNAV and VDP NA with Port Isabel altimeter setting.

MISSED APPROACH:
Climb to 2000 direct ZIPIV and hold.

ATIS 124.85	VALLEY APP CON 120.7 279.5	HARLINGEN TOWER ★ 119.3 (CTAF) 317.6	GND CON 121.7	UNICOM 122.95
-----------------------	--------------------------------------	---	-------------------------	-------------------------

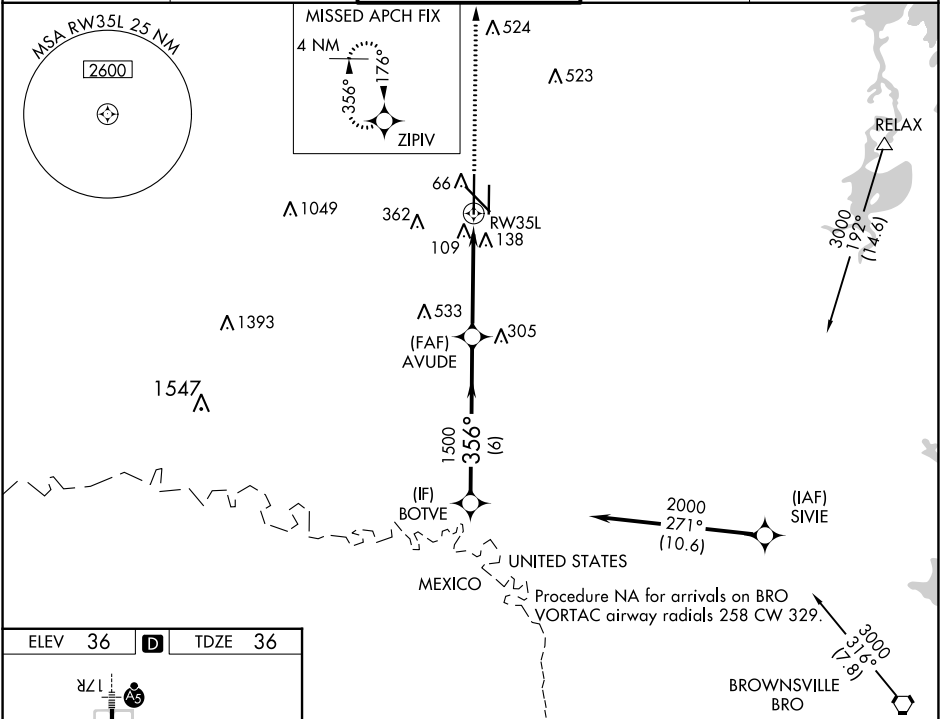

ELEV 36	D	TDZE 36
----------------	----------	----------------

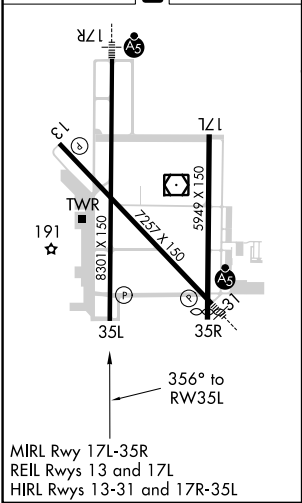

2000

ZIPIV

* LNAV only

AVUDE

1500

BOTVE

1.3 NM to RW35L

1.3 NM

3.1 NM

6 NM

356°

2000

1500

GP 3.00°

TCH 59

CATEGORY	A		B	C	D
LPV DA			286~3 ³ / ₄	250 (300~3 ³ / ₄)	
LNAV/VNAV DA			376-1 ¹ / ₈	340 (400-1 ¹ / ₈)	
LNAV MDA	500-1 464 (500-1)		500-1 ³ / ₈ 464 (500-1 ³ / ₈)		
CIRCLING	500-1 464 (500-1)	560-1 524 (600-1)	680-1 ³ / ₄ 644 (700-1 ³ / ₄)	680-2 644 (700-2)	