

VORTAC SAX 115.7 Chan 104	APP CRS 345°	Rwy Idg TDZE Apt Elev	N/A N/A 422
---	------------------------	-----------------------------	--



VOR-A
SUSSEX (F'WN)




When local altimeter setting not received, use Teterboro altimeter setting and increase all MDA 140 feet and ANKLE FIX Minimums Cats A & B visibility ¼ mile and Cat C ½ mile. Procedure NA at night. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climbing right turn to 3000 direct SAX VORTAC and hold.

ASOS 118.525	NEW YORK APP CON 127.6 379.9	UNICOM 122.7 (CTAF)
------------------------	--	-------------------------------

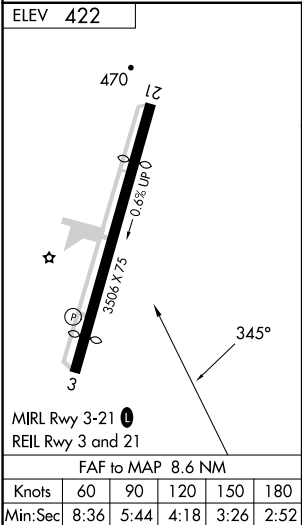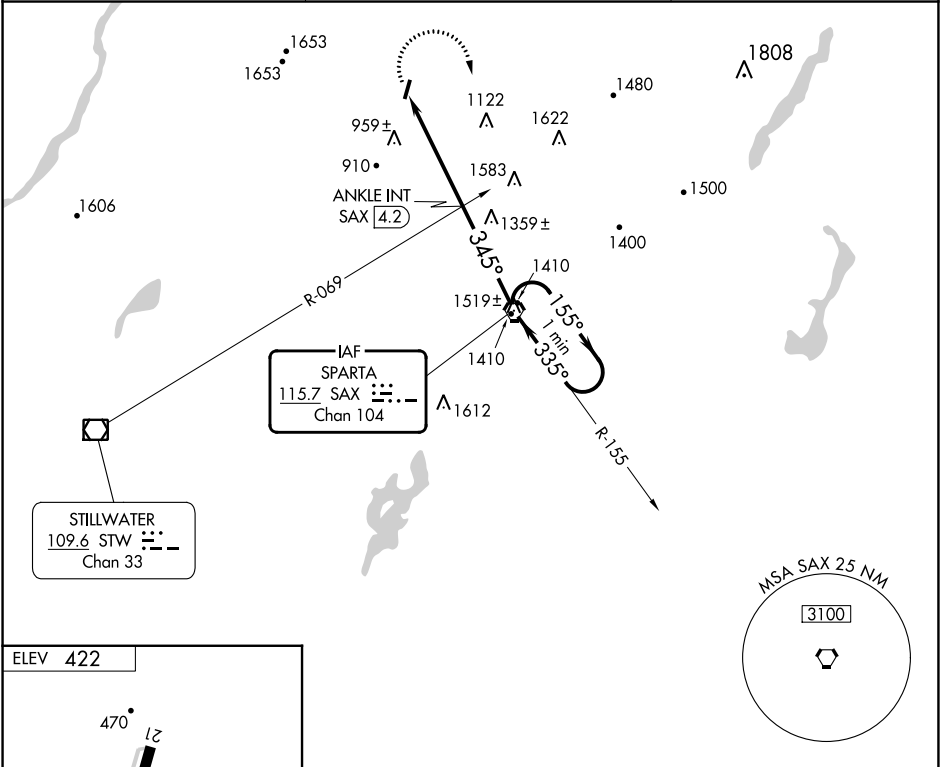

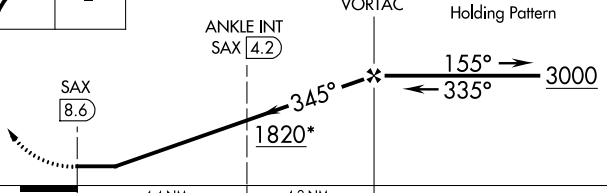3000	SAX 	*1960 when using Teterboro altimeter setting.			
		SAX VORTAC One Minute Holding Pattern			
SAX 8.6		345° 1820*			
4.4 NM		4.2 NM			
CATEGORY	A	B	C	D	
 CIRCLING	1820-1¼ 1398 (1400-1¼)	1820-1½ 1398 (1400-1½)	1820-3 1398 (1400-3)	NA	
ANKLE FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)					
 CIRCLING	1300-1 878 (900-1)	1300-1¼ 878 (900-1¼)	1300-2½ 878 (900-2½)	NA	

NE-2, 16 MAY 2024 to 13 JUN 2024

NE-2, 16 MAY 2024 to 13 JUN 2024