

|                                        |                        |                             |                                         |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|
| WAAS<br>CH <b>77601</b><br><b>W06A</b> | APP CRS<br><b>059°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>3505</b><br><b>831</b><br><b>839</b> |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|




RNAV (GPS) RWY 6  
ANN ARBOR MUNI (ARB)

RNP APCH.

**T** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 38°C. VDP and Baro-VNAV NA when using Willow Run altimeter setting. When local altimeter setting not received, use Willow Run altimeter setting and increase all DA/MDA 40 feet; increase LNAV Cots C and D visibility ½ SM.

**MISSED APPROACH:** Climb to 3000 direct VAQOL and hold.

|                       |                                        |                                            |                         |                          |                        |
|-----------------------|----------------------------------------|--------------------------------------------|-------------------------|--------------------------|------------------------|
| ATIS<br><b>134.55</b> | DETROIT APP CON<br><b>118.95 284.0</b> | ANN ARBOR TOWER ★<br><b>120.3 (CTAF) 0</b> | GND CON<br><b>121.6</b> | CLNC DEL<br><b>121.6</b> | UNICOM<br><b>123.0</b> |
|-----------------------|----------------------------------------|--------------------------------------------|-------------------------|--------------------------|------------------------|

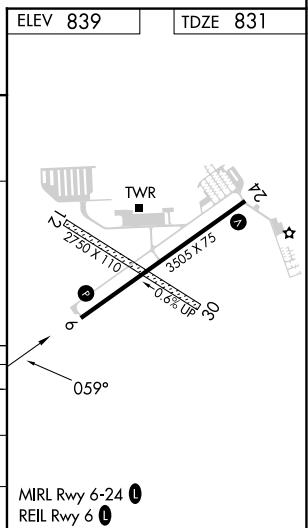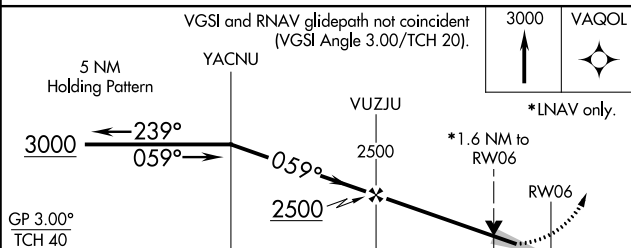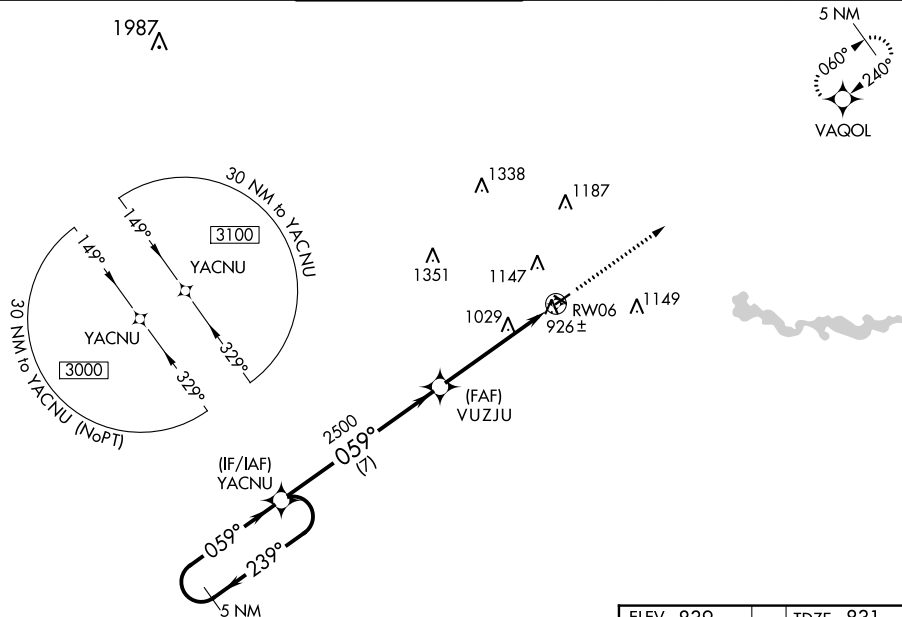

|               |     |                    |  |        |  |                      |  |  |  |
|---------------|-----|--------------------|--|--------|--|----------------------|--|--|--|
|               |     | 7 NM               |  | 3.5 NM |  | 1.6 NM               |  |  |  |
| CATEGORY      | A   | B                  |  | C      |  | D                    |  |  |  |
| LPV           | DA  | 1081-1 250 (300-1) |  |        |  |                      |  |  |  |
| LNAV/<br>VNAV | DA  | 1097-1 266 (300-1) |  |        |  |                      |  |  |  |
| LNAV          | MDA | 1360-1 529 (600-1) |  |        |  | 1360-1½ 529 (600-1½) |  |  |  |