

LOC I-HSA <u>110.35</u>	APP CRS 182°	Rwy Idg 8498 TDZE 23 Apt Elev 23
-----------------------------------	------------------------	---

ILS Y or LOC Y RWY 18
STENNIS INTL (HSA)


A Circling NA for Cat E west of Rwy 18-36: When local altimeter setting not received, use Gulfport altimeter setting; increase DA to 270 feet; increase all MDA 60 feet and S-LOC 18 Cats C/D/E visibility $\frac{1}{8}$ mile, Circling Cat C visibility $\frac{1}{8}$ mile and Cats D/E visibility $\frac{1}{4}$ mile. WUDGU fix minimums: increase S-LOC 18 Cats C/D/E visibility $\frac{1}{8}$ mile, and Circling Cats D/E visibility $\frac{1}{4}$ mile. For inop MALSR, increase S-ILS 18 Cat E visibility to $\frac{1}{4}$ mile, and S-LOC 18 Cats C/D/E visibility to $\frac{1}{8}$ mile. WUDGU fix minimums: increase S-LOC 18 Cats C/D/E visibility to 1 mile. For inop MALSR, use Gulfport altimeter setting; increase S-LOC 18 Cat E visibility to $\frac{1}{8}$ mile and S-LOC 18 Cat E visibility to $\frac{1}{8}$ mile. WUDGU fix minimums: increase S-LOC 18 Cat E visibility to $\frac{1}{8}$ mile.

MALSR
A5

MISSED APPROACH:
Climb to 700 then
climbing left turn to
2000 on heading
360° and on GPT
VORTAC R-298 to
STENN and hold.

AWOS-3PT	GULFPORT APP CON★ 124.6 354.1 (130°-309°) 127.5 254.25 (310°-129°)	STENNIS TOWER ★ 127.15 (CTAF) 0 229.4	GND CON 121.725 229.4	UNICOM 122.95
----------	--	---	---------------------------------	-------------------------

GPS REQUIRED

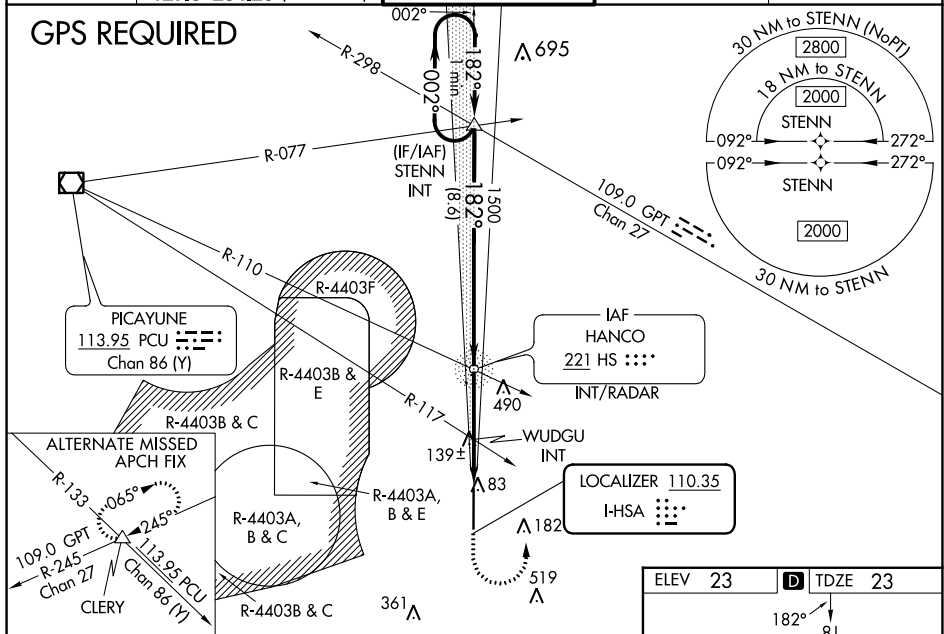

One Minute Holding Pattern

STENN INT

HS NDB/INT RADAR

WUDGU INT

700

2000

hdg 360°

GPT R-298

STENN

△

2000

← 002°

182° →

182°

1500

*520

*580 when using Gulfport altimeter setting.

*LOC only.

GS 3.00°

TCH 56'

8.6 NM

2.5 NM

1.8 NM

CATEGORY	A	B	C	D	E
S-ILS 18	223-1/2 200 (200-1/2)				
S-LOC 18	520-1 497 (500-1)				
CIRCLING	520-1 497 (500-1)				
	520-1 1/2 820-2 1/2 820-2 3/4				
	497 (500-1 1/2) 797 (800-2 1/2) 797 (800-2 3/4)				
WUDGU FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)					
S-LOC 18	400-1/2 377 (400-1/2)				
	400-3/8 377 (400-3/8)				
CIRCLING	480-1 457 (500-1)				
	520-1 1/2 820-2 1/2 820-2 3/4				
	497 (500-1 1/2) 797 (800-2 1/2) 797 (800-2 3/4)				

REIL Rwy 36

HIRL Rwy 18-36

FAF to MAP 4.3 NM

	Knots	60	90	120	150	180
Min:Sec	4:18	2:52	2:09	1:43	1:28	