


Baro-VNAV NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

NA Use Moultrie altimeter setting, when not received, use Tallahassee Intl altimeter setting and increase LPV DA to 609, LNAV/VNAV DA to 653, and all MDA 60 feet; increase LPV and LNAV/VNAV all Cats and LNAV Cats C/D visibility 1/5 SM and increase Circling Cats C/D visibility 1/4 SM.

MISSED APPROACH:
Climb to 3000 direct
YALUC and hold.


TALLAHASSEE APP CON★
128.7 254.3

UNICOM
122.7 (CTAF) 0

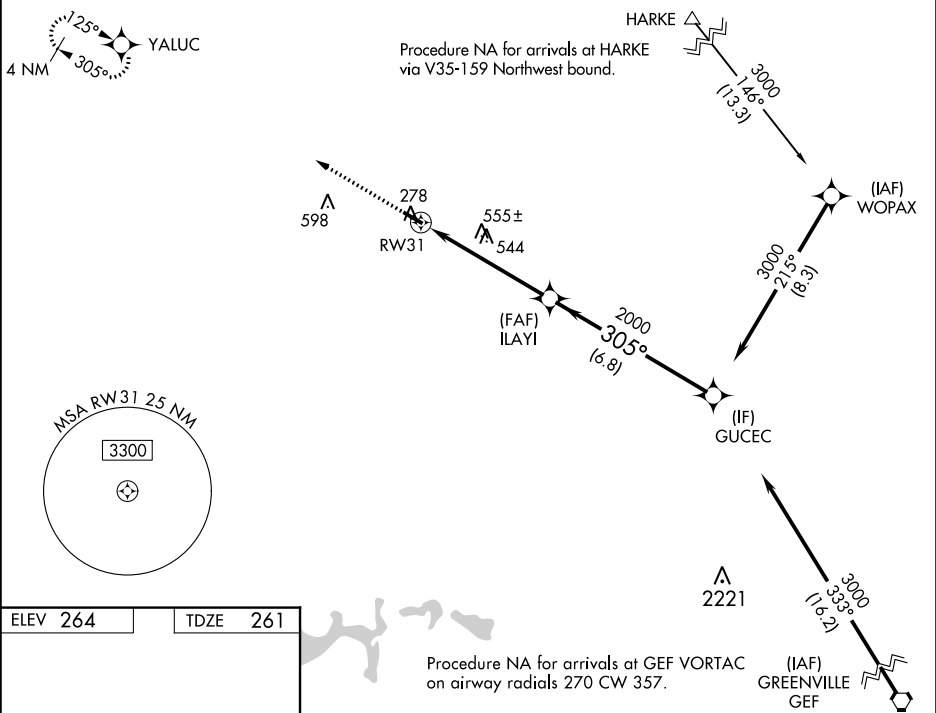

ELEV 264

TDZE 261

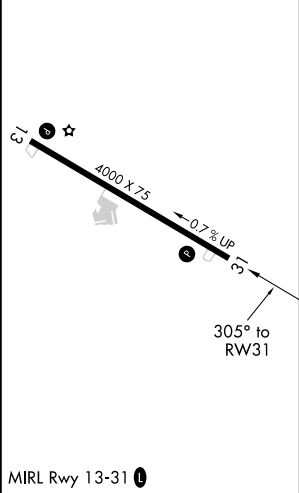

CATEGORY	A	B	C	D
LPV DA	565-1 304 (300-1)			
LNAV/VNAV DA	609-1½ 348 (400-1½)			
LNAV MDA	900-1 639 (700-1)	900-1½ 639 (700-1½)		
CIRCLING	900-1 636 (700-1)	1020-2¼ 756 (800-2¼)	1020-2½ 756 (800-2½)	