




| | | |
|--|------------------------|---|
| WAAS CH 81929 W04A | APP CRS 044° | Rwy Idg 8075 TDZE 661 Apt Elev 680 |
|--|------------------------|---|

RNAV (GPS) RWY 4R

CHICAGO O'HARE INTL (ORD)

| | | |
|--|-------|--|
| RNP APCH - GPS. | MALSR | MISSED APPROACH: Climb to 1200 then climbing right turn to 4000 direct LAIRD and hold, continue climb-in-hold to 4000. |
| ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 39°C. | | |

| | | | | | | |
|--|---|-------------------------------------|---|---|--------------------------|-------|
| D-ATIS 135.4 282.225 | CHICAGO APP CON 119.0 292.125 | O'HARE TOWER 120.75 348.0 | GND CON 124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRs) | (TWR CENTER) (OBND) 121.75 121.9 (IBND) | CLNC DEL 121.6 | CPDLC |
|--|---|-------------------------------------|---|---|--------------------------|-------|

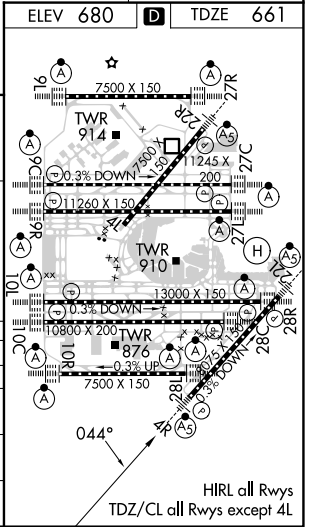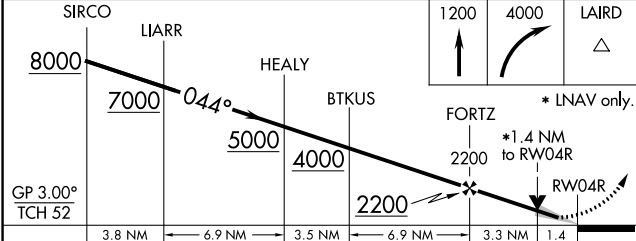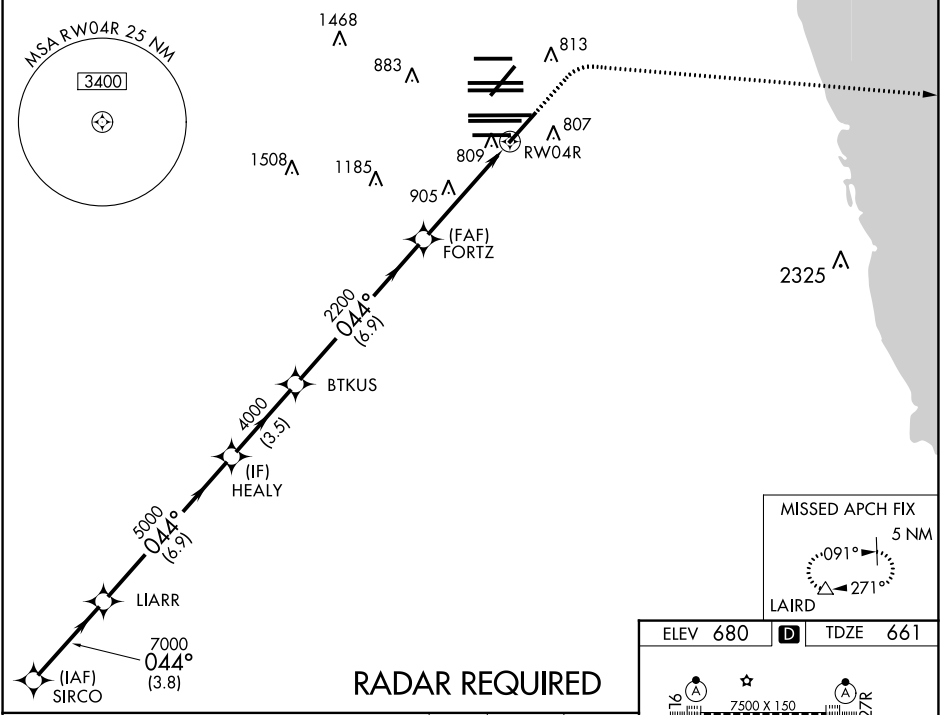

| | | | | |
|--------------|---------|-------------|-------------------------|-------------------------|
| CATEGORY | A | B | C | D |
| LPV DA | | 861/18 | 200 (200-½) | |
| LNAV/VNAV DA | | 990/32 | 329 (400-¾) | |
| LNAV MDA | 1160/24 | 499 (500-½) | 1160/50 | 499 (500-1) |
| CIRCLING | 1220-1 | 540 (600-1) | 1220-1½ 540 (600-1½) | 1460-2½ 780 (800-2½) |