RNAV (GPS) RWY 8R

PUEBLO MEML (PUB)

WAAS	APP CRS	Rwy Idg	10496
CH 70531	080°	TDZE	4671
W08A		Apt Elev	4729

RNP APCH-GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C. For inop ALS, increase LNAV/VNAV visibility to 7/8 SM.

MALSR

MISSED APPROACH: Climb to 7000 direct HELER and hold.

ATIS	DENVER APP CON ★	PUEBLO TOWER ★	GND CON	CLNC DEL	UNICOM
125.25	120.1 290.5	119.1 (CTAF) L 257.8	121.9	120.9	122.95

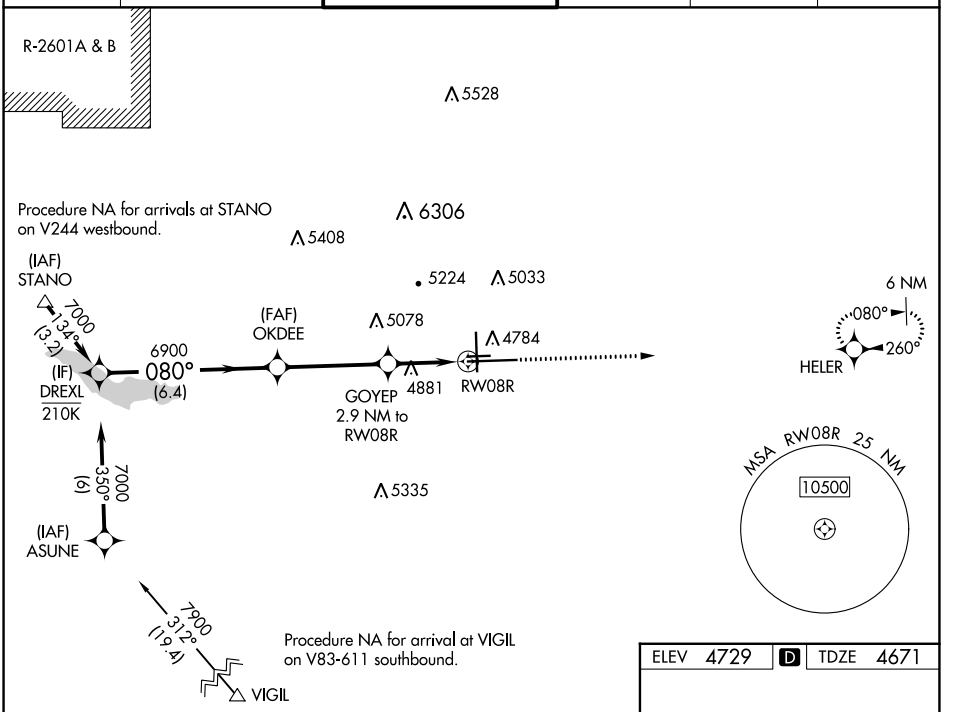

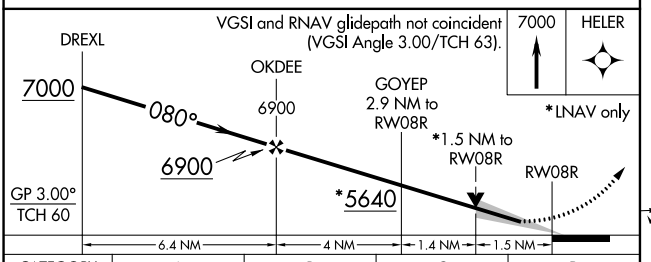

CATEGORY	A	B	C	D
LPV DA	4871- ½ 200 (200- ½)			
LNAV/VNAV DA	4982- ½ 311 (300- ½)			
LNAV MDA	5200- ½ 529 (500- ½)		5200-1 529 (500-1)	
C CIRCLING	5340-1 611 (700-1)		5580-2 ½ 851 (900-2 ½)	5800-3 1071 (1100-3)

ELEV 4729 D TDZE 4671



HIRL Rwy 8R-26L L
MIRL Rwys 17-35 and 8L-26R L
REIL Rwys 8L, 17, 26L, 26R and 35 L

SW-1, 11 JUL 2024 to 08 AUG 2024
SW-1, 11 JUL 2024 to 08 AUG 2024