



SIoux FALLS, SOUTH DAKOTA

# HI-ILS or LOC RWY 3


LOC I-FSD <b>109.9</b>	APCH CRS <b>030°</b>	Rwy ldg <b>8999</b> TDZE <b>1424</b> Arpt Elev <b>1430</b>	AL-396 [USAF]	JOE FOSS FLD (KFSD)
---------------------------	-------------------------	------------------------------------------------------------------	---------------	---------------------

DME required. * When ALS inop, increase CAT CDE RVR to 40, vis to ¼ mile. ** When ALS inop, increase CAT CDE vis to 1 ½ mile. *** When ALS inop, increase CAT CDE RVR to 55, vis to 1 mile.	MALSR A5	MISSED APPROACH: Climb to 3400, then climbing left turn to 5000 on heading 240° and FSD VORTAC R-269 to FRYRE (FSD 15 DME) and hold.
------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------	--------------------------------------------------------------------------------------------------------------------------------------

ATIS <b>126.6</b>	SIoux FALLS APP CON <b>125.8 306.2</b>	SIoux FALLS TOWER ★ <b>118.3(CTAF) 257.8</b>	GND CON <b>121.9 348.6</b>	ASR
----------------------	-------------------------------------------	-------------------------------------------------	-------------------------------	-----

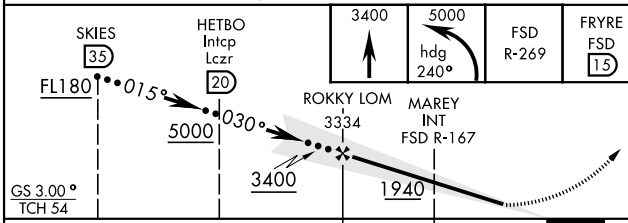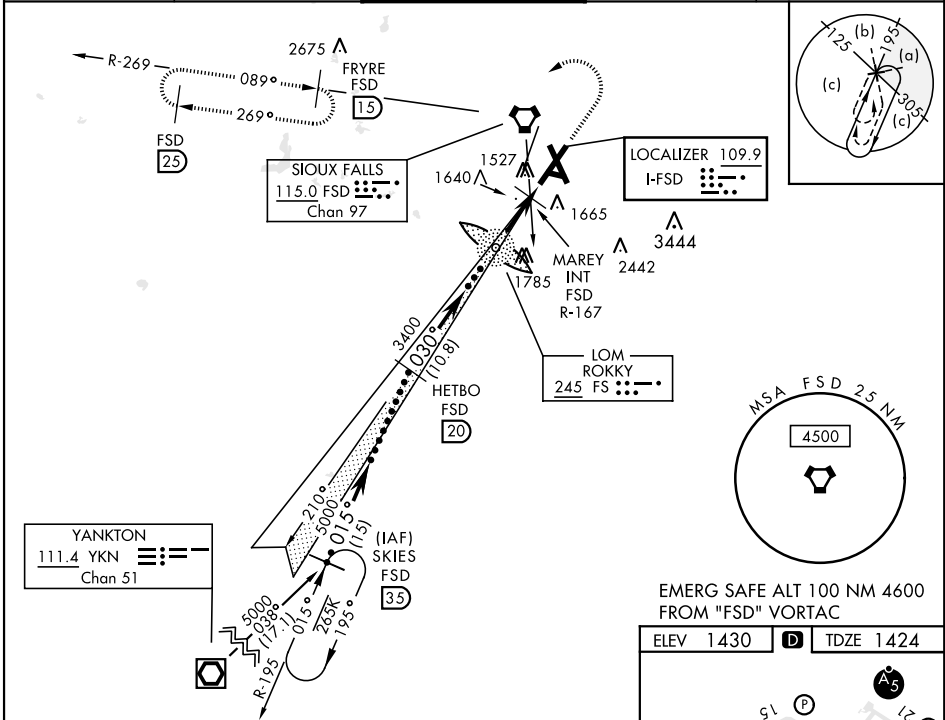

EMERG SAFE ALT 100 NM 4600 FROM "FSD" VORTAC

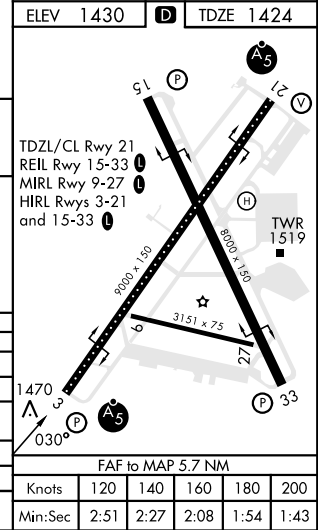

CATEGORY	C	D	E
S-ILS 3*	1674/24	250	(300-1/2)
S-LOC 3**	1940/55 516 (600-1)	1940/60 516 (600-1 1/2)	
CIRCLING	2060-1 3/4 630 (700-1 3/4)	2200-2 1/2 770 (800-2 1/2)	2300-3 870 (900-3)
MAREY FIX MINIMA			
S-LOC 3***	1780/30 356 (400-3/4)	1780/40 356 (400-3/4)	
CIRCLING	2060-1 3/4 630 (700-1 3/4)	2200-2 1/2 770 (800-2 1/2)	2300-3 870 (900-3)

SIoux FALLS, SOUTH DAKOTA 43°35'N-96°45'W JOE FOSS FLD (KFSD)

# HI-ILS or LOC RWY 3



NC-1, 11 JUL 2024 to 08 AUG 2024

NC-1, 11 JUL 2024 to 08 AUG 2024

Amdt 9B 04NOV21