

WAAS Ch 87099 W13A	APP CRS 130°	Rwy Idg 4559 TDZE 388 Apt Elev 390
--	------------------------	---

RNAV (GPS) RWY 13


TEXARKANA RGNL-WEBB FLD (TXK)

RNP APCH - GPS.


⚠ Baro-VNAV and VDP NA when using De Queen altimeter setting. Rwy 13 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C or above 54°C . When local altimeter setting not received, use De Queen altimeter setting and increase LPV DA to 748 feet and all Cats visibility $\frac{1}{4}$ SM, LNAV/VNAV DA to 868 feet all Cats visibility $\frac{3}{8}$ SM, and all MDAs 100 feet and LNAV and Circling Cats C/D visibility $\frac{1}{4}$ SM.

MISSED APPROACH:
Climb to 2000 direct WATLE and hold.

ATIS 120.2	FORT WORTH CENTER 123.925 269.475	TEXARKANA TOWER* 123.875 (CTAF) 235.625	GND CON 119.225
----------------------	---	---	---------------------------

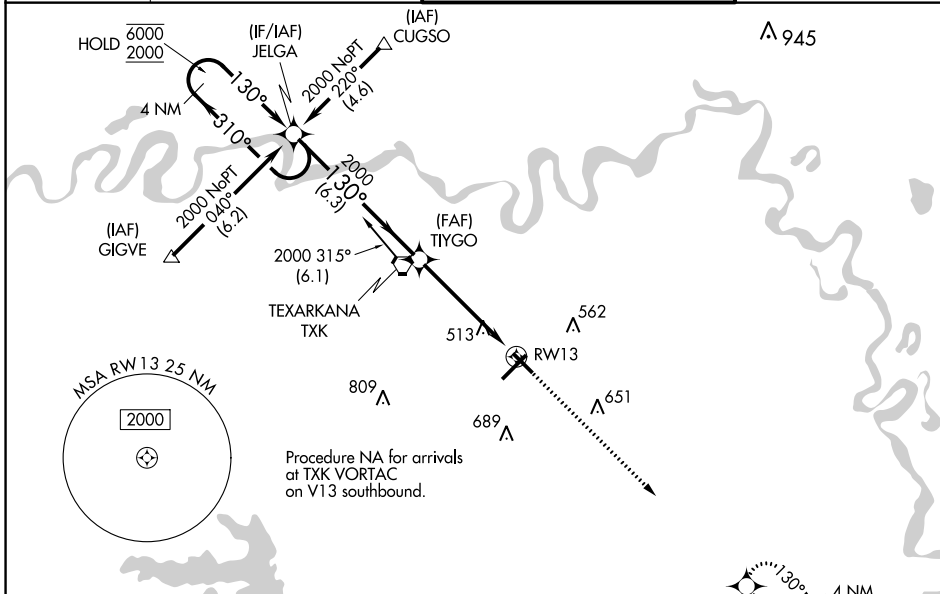

ELEV 390	D	TDZE 388
----------	----------	----------

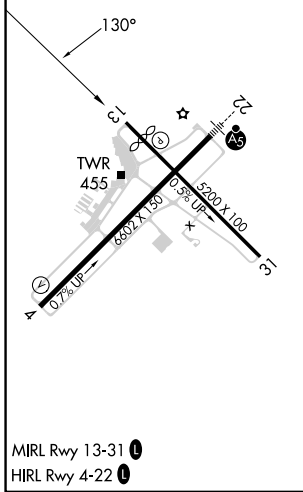

4 NM Holding Pattern		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 48).		2000	WATLE
6000 ← 310°		130° →		2000	1.2 NM to RW13
2000 ← 130°		2000 →			
GP 3.00°		6.3 NM		3.8 NM	
TCH 54		1.2 NM		RW13	
CATEGORY	A	B	C	D	
LPV DA	648- $\frac{3}{4}$		260 (300- $\frac{3}{4}$)		
LNAV/VNAV DA	768-1		380 (400-1)		
LNAV MDA	780-1	392 (400-1)	780- $\frac{1}{8}$	392 (400- $\frac{1}{8}$)	
CIRCLING	820-1 430 (500-1)	900-1 510 (600-1)	1000- $\frac{1}{4}$ 610 (700- $\frac{1}{4}$)	1080- $\frac{1}{4}$ 690 (700- $\frac{1}{4}$)	

SC-1, 11 JUL 2024 to 08 AUG 2024

SC-1, 11 JUL 2024 to 08 AUG 2024