

APP CRS	Rwy Idg	6857
130°	TDZE	451
	Apt Elev	476

RNAV (RNP) Z RWY 13R


PALM SPRINGS INTL (PSP)

RNP AR APCH, RF required.


▽ For uncompensated Baro-NAV systems, procedure NA below 1°C or above 54°C.

MISSED APPROACH: Climb to 900 then climbing left turn to 4000 direct TRM VORTAC and hold.

ATIS	SOCAL APP CON	PALM SPRINGS TOWER*	GND CON	CLNC DEL	UNICOM
124.65	126.7 370.95 135.275 251.1	119.7 (CTAF) 0 377.05	121.9	128.35	122.95

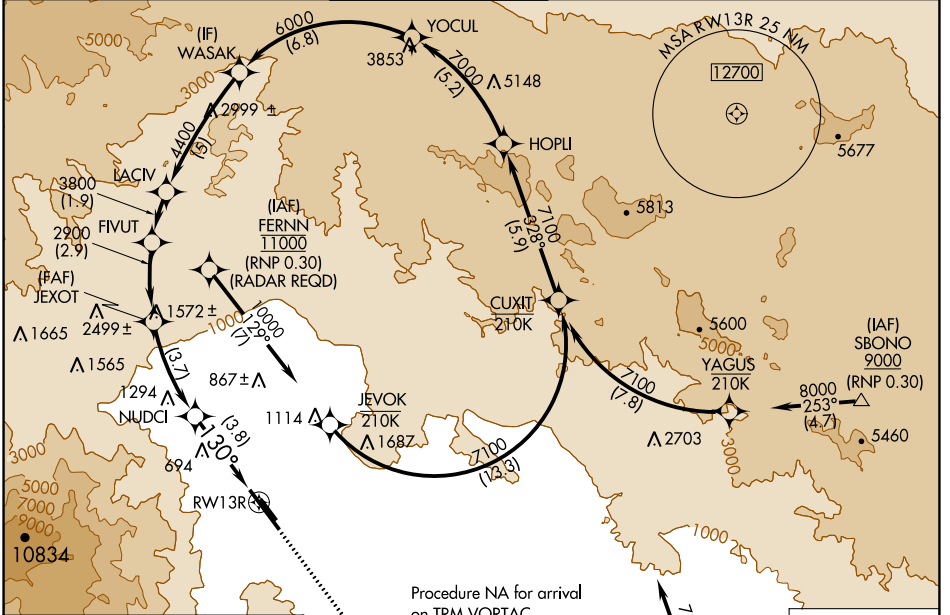

ELEV 476	D	TDZE 451
----------	----------	----------

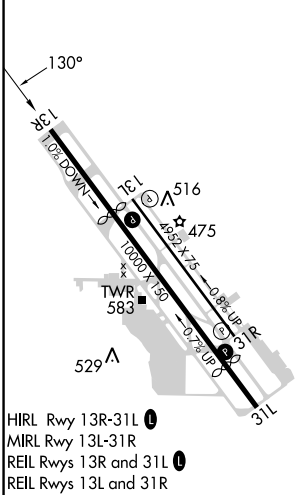

PALM SPRINGS, CALIFORNIA
Amdt 1A 05DEC19

Procedure NA for arrival on TRM VORTAC airway radials 263 CW 021.

(IAF) THERMAL TRM 9000 (RNP 0.30)

MISSED APCH FIX

THERMAL TRM 130° 4 NM

WASAK	VGSi and descent angles not coincident (VGSi Angle 3.00/TCH 47).				900	4000	TRM
6000	LACIV	FIVUT	JEXOT	NUDCI	RWY 13R		
	4400	3800	2900	1713			
GP 3.00°					130°		
TCH 45							
	5 NM		1.9 NM		2.9 NM		3.7 NM
CATEGORY	A	B	C	D			
RNP 0.17 DA		812-1¼	361 (400-1¼)				
RNP 0.30 DA		882-1½	431 (500-1½)				

AUTHORIZATION REQUIRED