WAAS	APP CRS	Rwy Idg	5000
CH 93904	167°	TDZE	1864
W17A		Apt Elev	1864

RNAV (GPS) RWY 17

RUSSELL MUNI (RSL)

Baro-VNAV and VDP NA when using Hays altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Hays altimeter setting: increase LPV DA all Cats to 2186 feet, LNAV/VNAV all Cats DA to 2244 feet and all visibilities ¼ SM; increase all MDA 80 feet and LNAV Cat C and Circling Cat C visibility ¼ SM. Circling NA to Rwys 3 and 21.

MISSED APPROACH: Climb to 4000 direct BAQFO and hold.

ASOS	KANSAS CITY CENTER	UNICOM
128.325	124.4 322.4	122.7 (CTAF) L

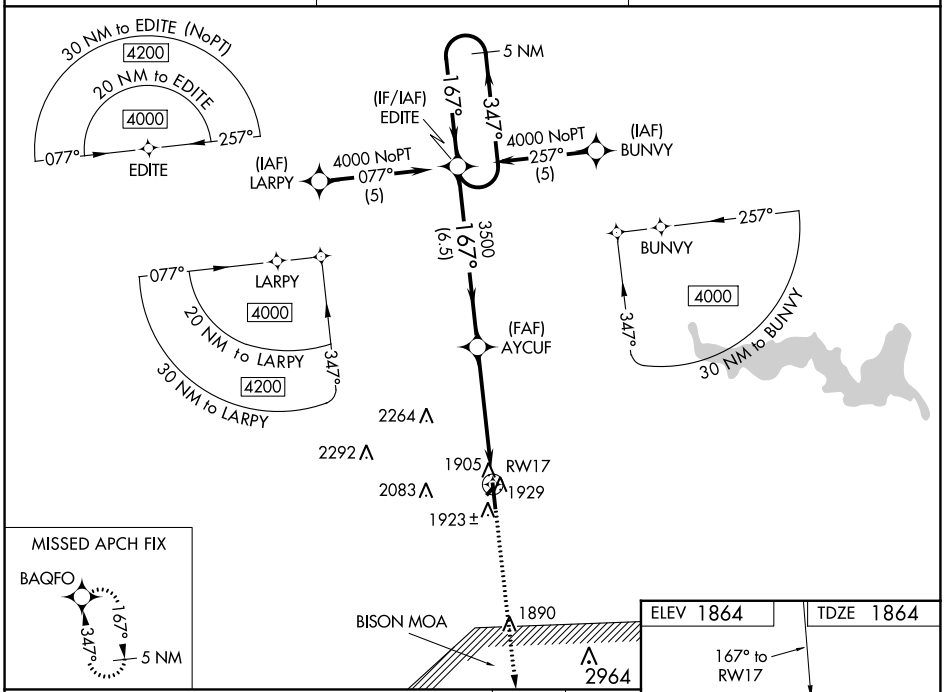

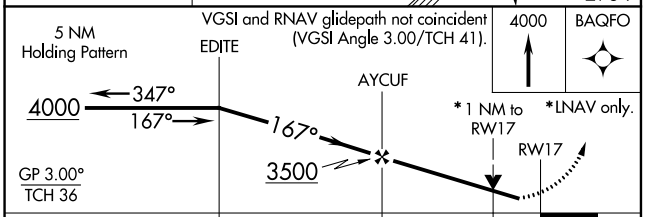

CATEGORY	A	B	C	D
LPV DA	2117-1 253 (300-1)			NA
LNAV/VNAV DA	2175-1⅛ 311 (400-1⅛)			NA
LNAV MDA	2220-1 356 (400-1)			NA
CIRCLING	2240-1 376 (400-1)	2320-1 456 (500-1)	2620-2¼ 756 (800-2¼)	NA

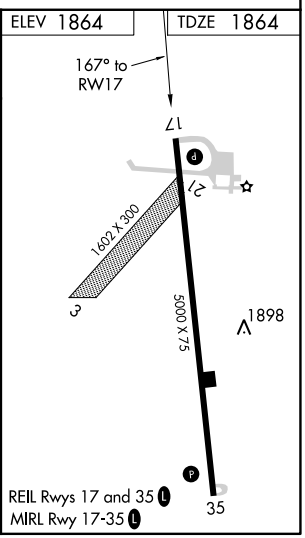

NC-2, 11 JUL 2024 to 08 AUG 2024
NC-2, 11 JUL 2024 to 08 AUG 2024