

WAAS CH <b>69217</b> <b>W04A</b>	APP CRS <b>044°</b>	Rwy Idg TDZE Apt Elev	<b>7701</b> <b>889</b> <b>913</b>
--	------------------------	-----------------------------	---



# RNAV (GPS) RWY 4

CHIPPEWA VALLEY RGNL (EAU)

**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Rice Lake Rgnl/Carl's Fld altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Rice Lake Rgnl/Carl's Fld altimeter setting and increase LPV DA to 1199, LNAV/VNAV DA to 1489 and all visibilities ¾ SM. Increase all MDA 120 feet and LNAV Cat C/D and Circling Cat C visibility ¼ SM. Circling Rwy 32 NA at night.

MISSED APPROACH:  
Climb to 3000 direct IROKE and hold.

ATIS <b>126.025</b>	MINNEAPOLIS CENTER <b>125.3 335.6</b>	EAU CLAIRE TOWER* <b>118.575 (CTAF) 0</b>	GND CON <b>120.925</b>	UNICOM <b>122.95</b>
------------------------	--	--	---------------------------	-------------------------

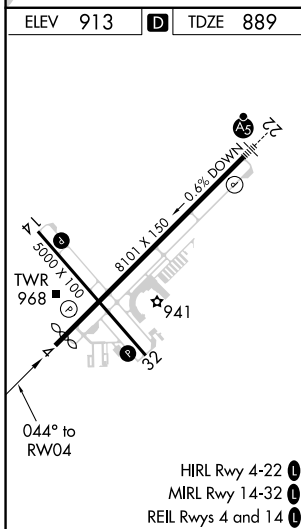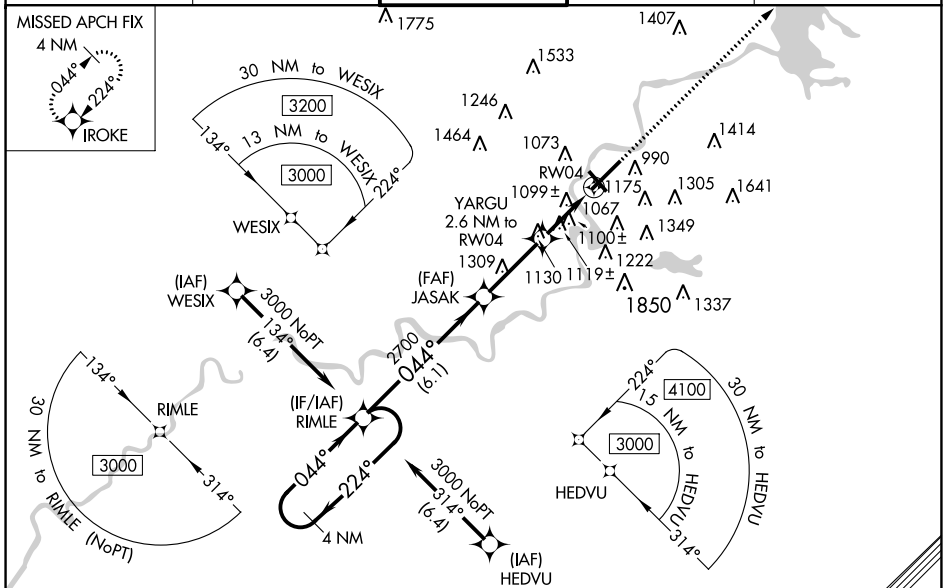

ELEV 913	<b>D</b>	TDZE 889			
4 NM Holding Pattern	RIMLE	JASAK	YARGU	3000	IROKE
3000 ← 224°	→ 044°	044°	2700	2.6 NM to RW04	*LNAV only
GP 3.00°	TCH 44	*1740	*1.3 NM to RW04	RW04	
CATEGORY		A	B	C	D
LPV DA		1089-¾		200 (200-¾)	
LNAV/VNAV DA		1379-1½		490 (500-1½)	
LNAV MDA		1360-1 471 (500-1)		1360-1¾ 471 (500-1¾)	
<b>C</b> CIRCLING		1480-1 567 (600-1) 1540-1 627 (700-1)		1660-2¼ 747 (800-2¼) 2200-3 1287 (1300-3)	

EC-3, 11 JUL 2024 to 08 AUG 2024

EC-3, 11 JUL 2024 to 08 AUG 2024