RNAV (GPS) RWY 20

CAPE GIRARDEAU RGNL (CGI)

WAAS	APP CRS		
CH 42832	203°	Rwy Idg	3997
W20A		TDZE	339
		Apt Elev	342

RNP APCH-GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Cairo altimeter setting and increase LPV DA to 637 feet and all visibilities 1/8 SM; increase LNAV/VNAV DA to 652 feet; increase all MDAs 60 feet; increase LNAV and Circling visibility Cats C and D 1/4 SM. Rwy 20 helicopter visibility reduction below 3/4 SM NA. Baro-VNAV and VDP NA when using Cairo altimeter setting.

MISSED APPROACH: Climb to 3000 direct ZUGUB and hold.

ASOS	MEMPHIS CENTER	CAPE GIRARDEAU TOWER ★	GND CON	UNICOM
120.55	133.65 292.15	125.525 (CTAF) L	124.7	122.95

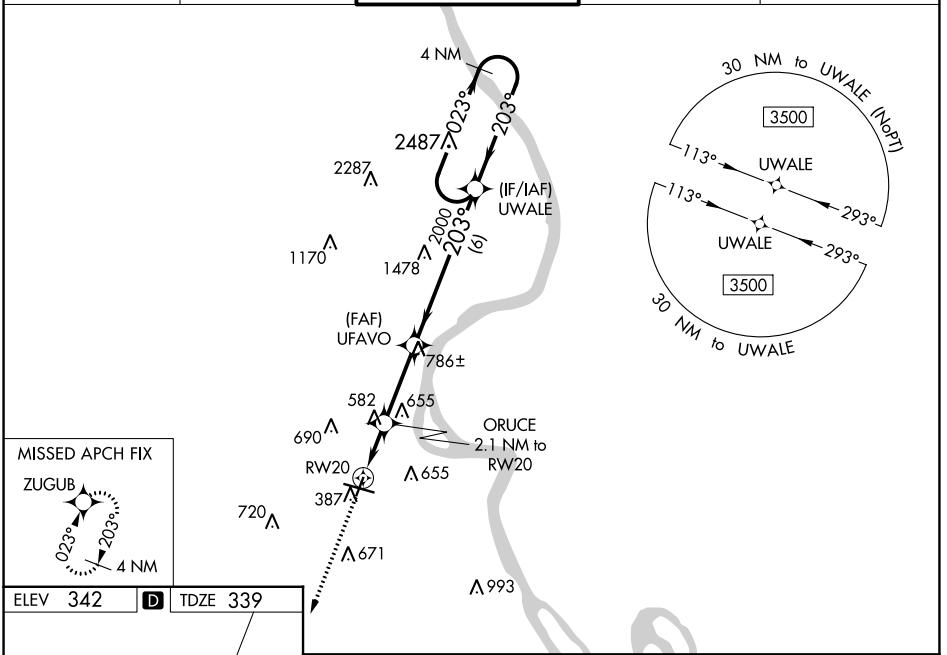

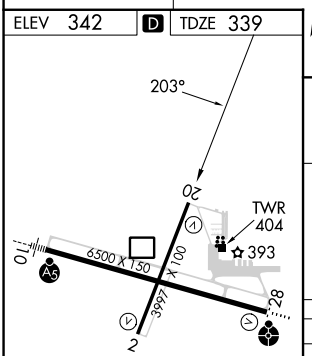

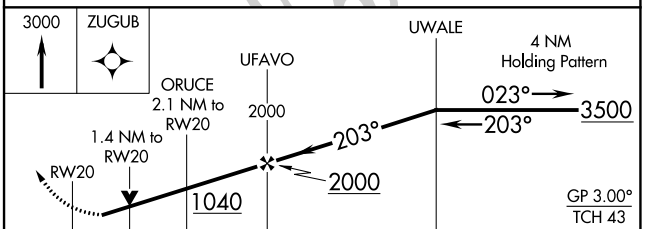

CATEGORY	A	B	C	D
LPV DA	589-1 250 (300-1)			
LNAV/VNAV DA	604-1 265 (300-1)			
LNAV MDA	840-1 501 (500-1)		840-1 3/8 501 (500-1 3/8)	
C CIRCLING	860-1 518 (600-1)	960-1 618 (700-1)	1000-1 3/4 658 (700-1 3/4)	1080-2 1/4 738 (800-2 1/4)

MIRL Rwy 2-20 L
HIRL Rwy 10-28 L

NC-3, 11 JUL 2024 to 08 AUG 2024
NC-3, 11 JUL 2024 to 08 AUG 2024