

WAAS CH 97617 W11A	APP CRS 111°	Rwy Idg 6525 TDZE 871 Apt Elev 871
--	------------------------	---

RNAV (GPS) RWY 11

CENTRAL IL RGNL/BLOOMINGTON-NORMAL (BMI)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6°C (4°F) or below 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using General Downing-Peoria Intl altimeter setting. When local altimeter setting not received, use General Downing-Peoria Intl setting: increase all DA 116 feet and all MDA 120 feet; increase LPV all Cats visibility ½ mile, LNAV/VNAV all Cats and LNAV Cat C/D visibility ¾ mile, and Circling Cats C/D visibility ¼ mile.


MISSED APPROACH:
Climb to 3100 direct
WAPIX and hold.

ATIS
119.575

SAINT LOUIS APP CON
128.725 256.9

BLOOMINGTON TOWER ★
124.6 (CTAF) **L** 269.575


GND CON
121.65

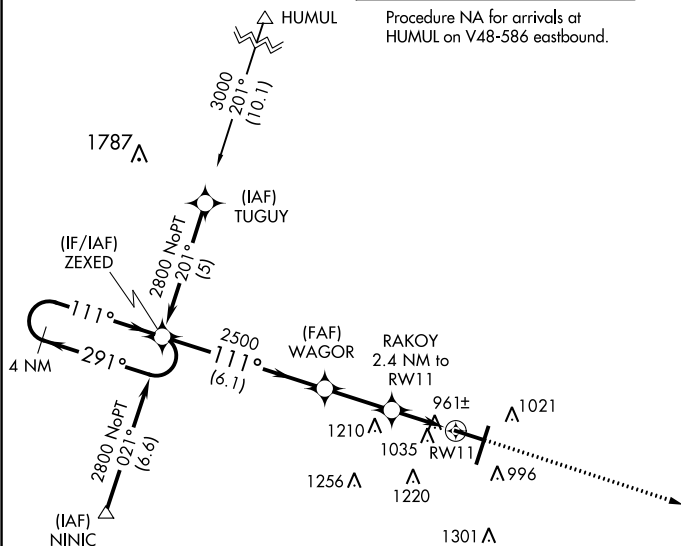UNICOM
122.95


MSA RW11 25 NM

2800

Procedure NA for arrivals at NINIC on V434 southeast bound

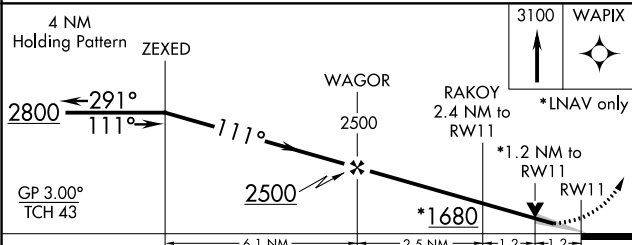

CATEGORY		A		B		C		D	
LPV	DA	1121-3 ₄ 250 (300-3 ₄)							
LNAV/ VNAV	DA	1341-1 ₈ 470 (500-1 ₈)							
LNAV	MDA	1280-1 409 (500-1)				1280-1 ₄ 409 (500-1 ₄)			
C CIRCLING		1340-1 469 (500-1)				1620-2 ₄ 749 (800-2 ₄)		1620-2 ₂ 749 (800-2 ₂)	

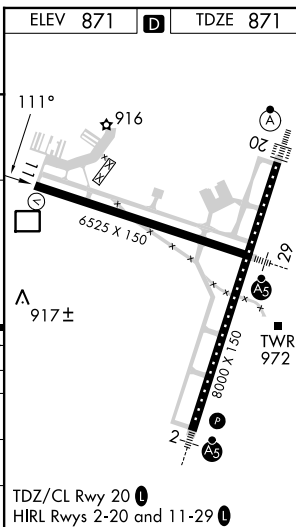

BLOOMINGTON/NORMAL, ILLINOIS

Amdt 1A 15OCT15

CENTRAL IL RGNL/BLOOMINGTON-NORMAL (BMT)

40°29'N-88°55'W

RNAV (GPS) RWY 11