

|                           |                        |                             |   |
|---------------------------|------------------------|-----------------------------|---|
| LOC I-JAN<br><b>110.5</b> | APP CRS<br><b>159°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>8500</b><br><b>312</b><br><b>346</b> |
|---------------------------|------------------------|-----------------------------|---|





# ILS or LOC RWY 16L

JACKSON-MEDGAR WILEY EVERS INTL (JAN)

**ASR** Circling NA for Cat E southwest of Rwy 16R-34L. When local altimeter setting not received, use Hawkins Fld altimeter setting and increase all DA 19 feet and all MDA 20 feet. For inop ALS, increase S-ILS 16L Cat E visibility to RVR 4000 and increase S-LOC 16L Cats C/D/E visibility to 1 3/8 SM. For inop ALS when using Hawkins Fld altimeter setting, increase S-ILS 16L Cat E visibility to RVR 4000 and increase S-LOC 16L Cats C/D/E visibility to 1 1/2 SM. Procedure turn NA for Cat E.

**ALS-F-2** MISSED APPROACH: Climb to 800 then climbing left turn to 3000 on heading 090° and MHZ VORTAC R-134 to RAKIN INT/16.5 DME and hold.

|                       |   |  |                               |                         |
|-----------------------|---|--|-------------------------------|-------------------------|
| ATIS<br><b>121.05</b> | JACKSON APP CON *<br><b>123.9 317.7</b> | JACKSON TOWER *<br><b>120.9 (CTAF) 352.0</b> | GND CON<br><b>121.7 348.6</b> | UNICOM<br><b>122.95</b> |
|-----------------------|---|--|-------------------------------|-------------------------|

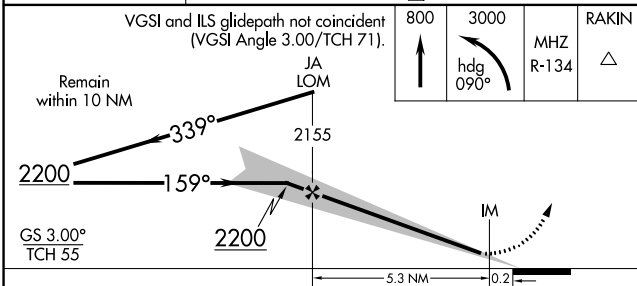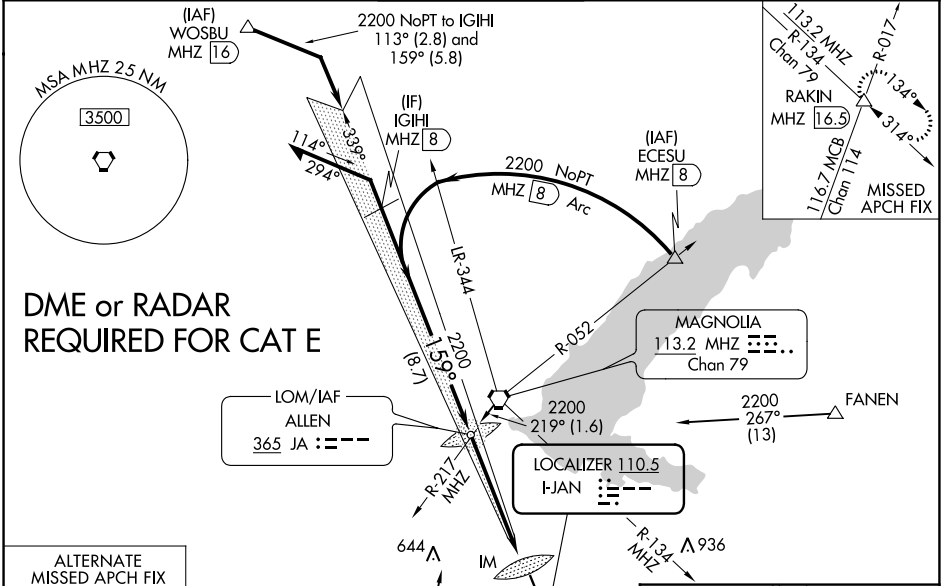

|           |                      |               |                 |             |                 |
|-----------|----------------------|---------------|-----------------|-------------|-----------------|
| CATEGORY  | A                    | B             | C               | D           | E               |
| S-ILS 16L | 512/18 200 (200-1/2) |               |                 |             |                 |
| S-LOC 16L | 820/24               | 508 (500-1/2) | 820/55          |             | 508 (500-1)     |
| CIRCLING  | 880-1                | 900-1         | 900-1 1/2       | 960-2       | 1040-2 1/2      |
|           | 534 (600-1)          | 554 (600-1)   | 554 (600-1 1/2) | 614 (700-2) | 694 (700-2 1/2) |

|                   |      |      |      |      |      |
|-------------------|------|------|------|------|------|
| FAF to MAP 5.5 NM |      |      |      |      |      |
| Knots             | 60   | 90   | 120  | 150  | 180  |
| Min:Sec           | 5:30 | 3:40 | 2:45 | 2:12 | 1:50 |

SC-4, 11 JUL 2024 to 08 AUG 2024

SC-4, 11 JUL 2024 to 08 AUG 2024