

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 61107 W13A | APP CRS 132° | Rwy Idg TDZE Apt Elev | 3498 827 827 |
|--|------------------------|-----------------------------|---|



RNAV (GPS) RWY 13

JOHN F KENNEDY MEML (ASX)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -28°C (-18°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below 3/4 SM NA. Baro-VNAV and VDP NA when using Ironwood altimeter setting. When local altimeter setting not received, use Ironwood altimeter setting and increase all DAs 132 feet and all MDAs 140 feet; increase LPV, LNAV/VNAV all Cats, and LNAV Cat C/D visibility 3/8 mile and Circling Cat C/D visibility 1/2 mile.


MISSED APPROACH:
Climb to 3500 direct JILUL and hold.

| | | | |
|------------------------|---|----------------------|---------------------------------|
| ASOS 126.775 | MINNEAPOLIS CENTER 126.45 276.4 | GCO 122.25 | UNICOM 122.8 (CTAF) 0 |
|------------------------|---|----------------------|---------------------------------|

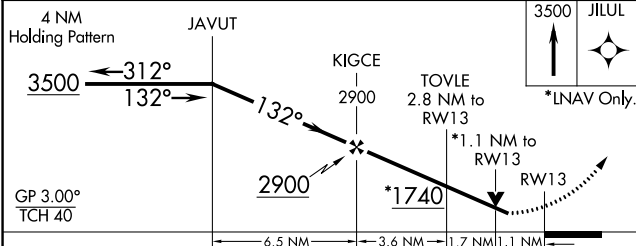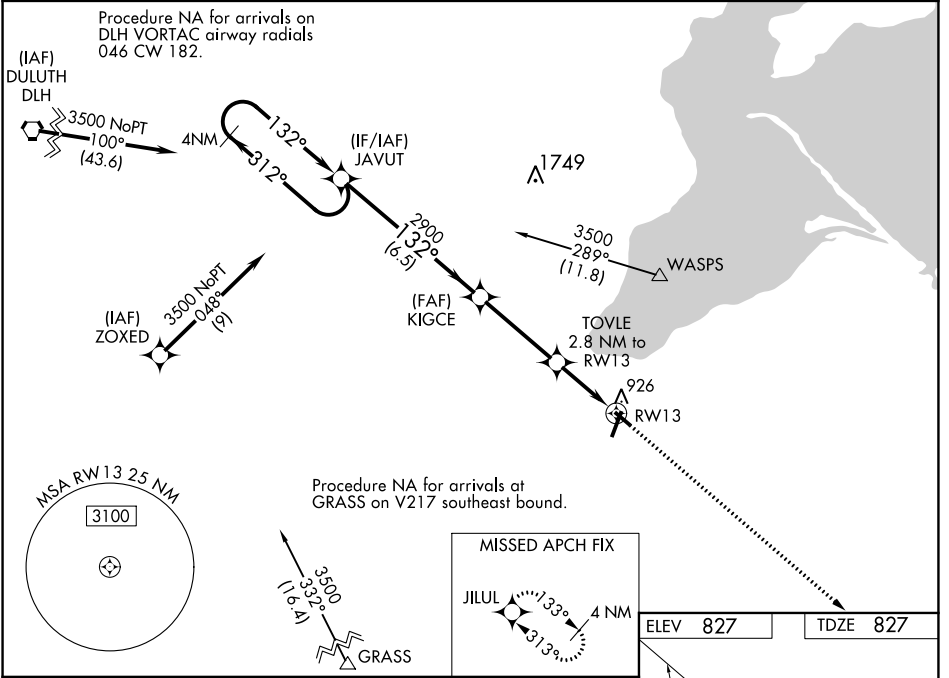

| | |
|----------|----------|
| ELEV 827 | TDZE 827 |
|----------|----------|

| CATEGORY | A | B | C | D |
|-------------------|-----------------------|-----------------------|-------------------------------|-------------------------------|
| LPV DA | | 1077-7/8 | 250 (300-7/8) | |
| LNAV/ VNAV DA | | 1110-1 | 283 (300-1) | |
| LNAV MDA | | 1200-1 | 373 (400-1) | |
| C CIRCLING | 1240-1 413 (500-1) | 1280-1 453 (500-1) | 1440-1 1/4 613 (700-1 1/4) | 1560-2 1/4 733 (800-2 1/4) |

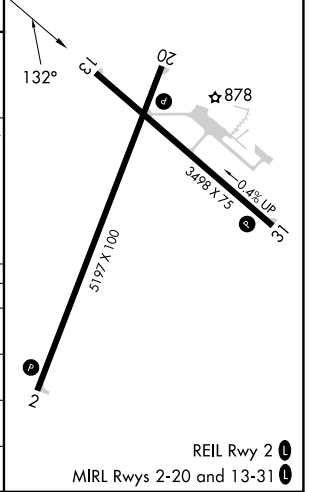

EC-3, 11 JUL 2024 to 08 AUG 2024

EC-3, 11 JUL 2024 to 08 AUG 2024