

WAAS CH <b>40237</b> <b>W14A</b>	APP CRS <b>141°</b>	Rwy ldg TDZE Apt Elev	<b>3851</b> <b>1117</b> <b>1122</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) RWY 14

WEBSTER CITY MUNI (EBS)


**⚠** Baro-VNAV NA when using Clarion altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Clarion altimeter setting and increase all DAs 49 feet, and all MDA 60 feet; increase LNAV/VNAV all Cats visibility 1/8 mile. Helicopter visibility reduction below 3/4 SM NA.

MISSED APPROACH: Climb to 3000 direct OLT0E and hold.

AWOS-3  
**127.825**

MINNEAPOLIS CENTER  
**134.0 288.3**



UNICOM  
**122.8 (CTAF) 0**

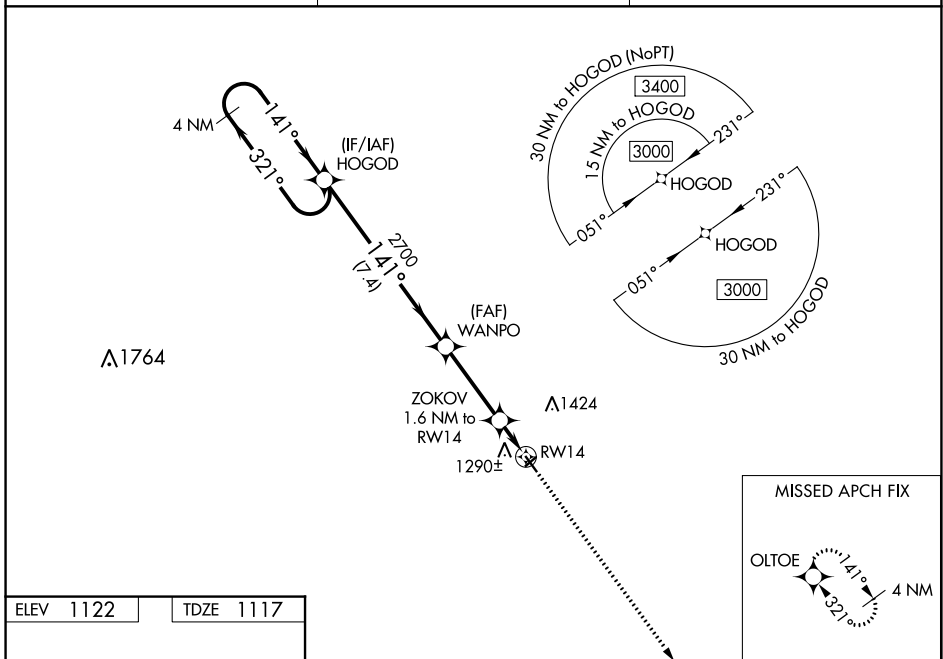

NC-3, 11 JUL 2024 to 08 AUG 2024

NC-3, 11 JUL 2024 to 08 AUG 2024

ELEV 1122	TDZE 1117
-----------	-----------

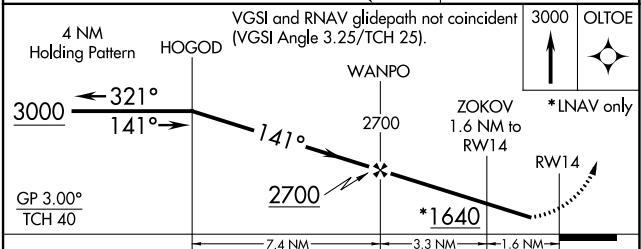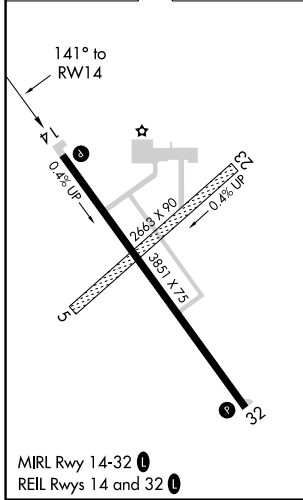

CATEGORY	A	B	C	D
LPV DA	1367-1	250 (300-1)		NA
LNAV/VNAV DA	1463-1 1/4	346 (400-1 1/4)		NA
LNAV MDA	1540-1	423 (500-1)		NA
<b>C</b> CIRCLING	1600-1	478 (500-1)		NA