# RNAV (GPS) RWY 35

WINSTON FLD (SNK)

| WAAS | APP CRS | Rwy Idg | 5599 |
|---|---|---|---|
| CH 70331 | 352° | TDZE | 2426 |
| W35A | | Apt Elev | 2430 |

RNP APCH-GPS.

Baro-VNAV NA when using Sweetwater altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. VDP NA with Sweetwater altimeter setting. When local altimeter setting not received, use Sweetwater altimeter setting and increase LPV DA to 2698 and all visibilities ⅛ SM; increase LNAV/VNAV DA to 2748 and all visibilities ⅜ SM; increase all MDAs 80 feet and LNAV and Circling visibility Cat C ¼ SM. Circling NA to Rwys 8 and 26. Circling Rwy 17 NA at night.

MISSED APPROACH: Climb to 5000 direct VARVY and on track 027° to WABVI and hold, continue climb-in-hold to 6000.

| AWOS-3 | FORT WORTH CENTER | UNICOM |
|---|---|---|
| 119.925 | 127.45 290.3 | 122.8 (CTAF) L |

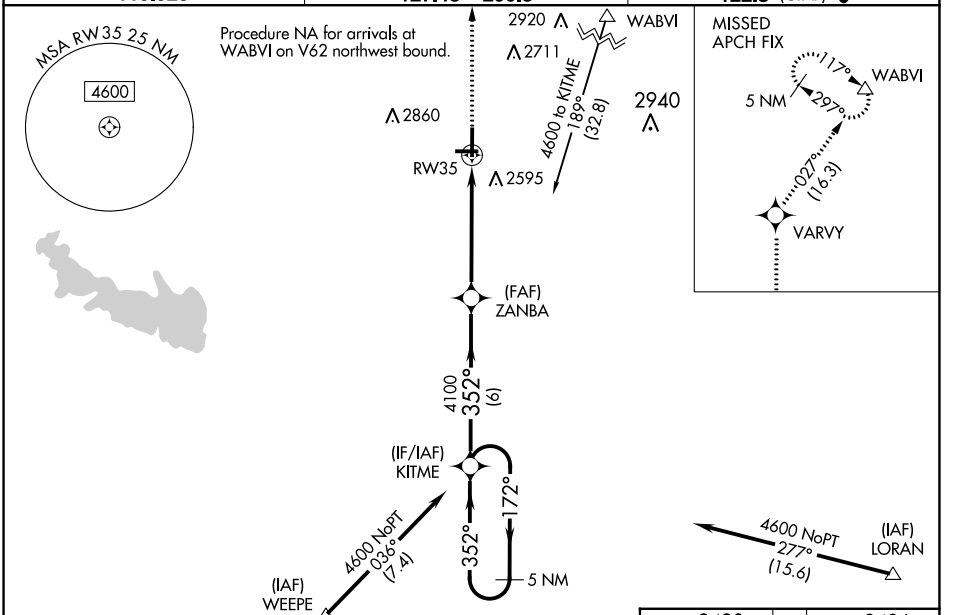


| ELEV 2430 | TDZE 2426 |
|---|---|

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).

| 5000 | VARVY | tr 027° | WABVI |
|---|---|---|---|

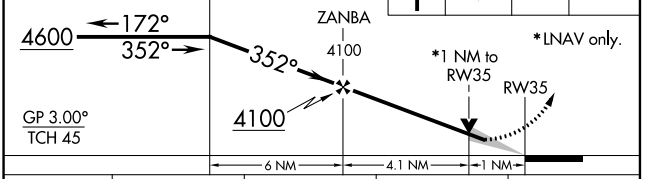


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 2626-¾ 200 (200-¾) | | | NA |
| LNAV/VNAV DA | 2676-¾ 250 (300-¾) | | | NA |
| LNAV MDA | 2780-1 354 (400-1) | | | NA |
| CIRCLING | 2940-1 510 (600-1) | | 3220-2¼ 790 (800-2¼) | NA |

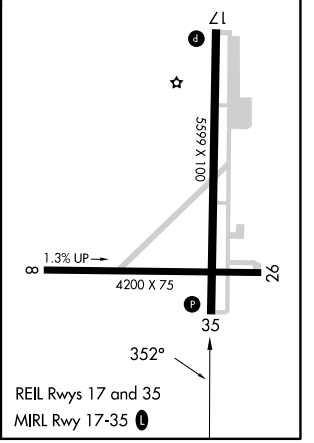


REIL Rwys 17 and 35
MIRL Rwy 17-35 L



SC-2, 11 JUL 2024 to 08 AUG 2024
SC-2, 11 JUL 2024 to 08 AUG 2024