





VORTAC BLD <b>116.7</b> Chan 114	APP CRS <b>247°</b>	Rwy Idg TDZE Apt Elev <b>N/A</b> <b>N/A</b> <b>2491</b>
----------------------------------------	------------------------	------------------------------------------------------------------------

**VOR-C**  
HENDERSON EXEC (HND)

**⚠** Circling to Rwy 35L NA at night.  
**⚠** When local altimeter setting not received, use Harry Reid Intl altimeter setting and increase all MDAs 60 feet.

MISSED APPROACH: Climb to 7000 on BLD VORTAC R-247 to GABIL INT/BLD 15.5 DME and right turn direct BLD VORTAC and hold.

ATIS <b>120.775</b>	LAS VEGAS APP CON <b>125.475 307.25</b>	HENDERSON TOWER* <b>125.1</b> (CTAF) <b>0</b>	GND CON <b>127.8</b>	CLNC DEL <b>135.35</b>	CLNC DEL <b>125.475</b> (when twr closed)	UNICOM <b>122.95</b>
------------------------	--------------------------------------------	--------------------------------------------------	-------------------------	---------------------------	-------------------------------------------------	-------------------------

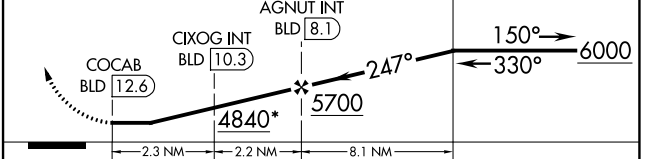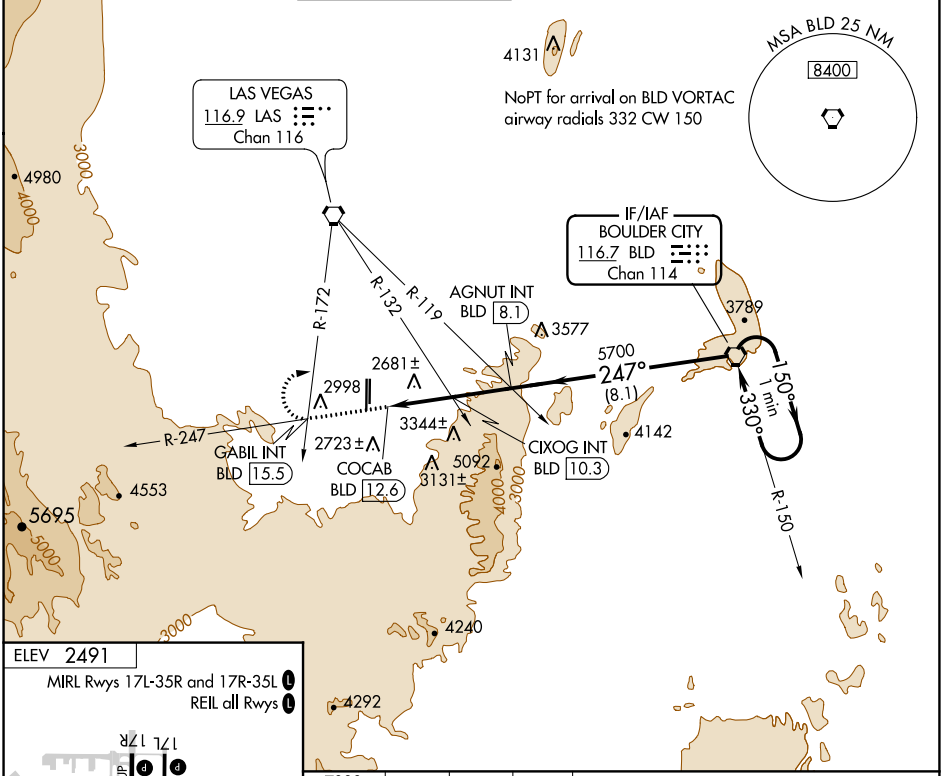

CATEGORY	A	B	C	D
CIRCLING	4840-1¼ 2349 (2400-1¼)	4840-1½ 2349 (2400-1½)	4840-3 2349 (2400-3)	NA
CIXOG FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
CIRCLING	3700-1¼ 1209 (1300-1¼)	3700-1½ 1209 (1300-1½)	3700-3 1209 (1300-3)	NA