

APP CRS 353°	Rwy Idg TDZE Apt Elev	12000 5434 5434
------------------------	-----------------------------	--

RNAV (RNP) Z RWY 35L

DENVER INTL (DEN)




▽ For uncompensated Baro-VNAV systems, procedure NA below -25°C (-13°F) or above 46°C (115°F). GPS required. For inoperative ALSF, increase RNP 0.10 all Cats visibility to RVR 4500 and RNP 0.30 all Cats visibility to RVR 5000. Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2



MISSED APPROACH: Climb to 10000, then right turn direct GLL VOR/DME and hold.

D-ATIS	DENVER APP CON		DENVER TOWER		GND CON	CLNC DEL	CPDLC
ARR 125.6 379.9	119.3 307.3	120.35 379.3	124.3 322.45		121.85 377.1	118.75	
DEP 134.025	(NORTH)	(SOUTH)					

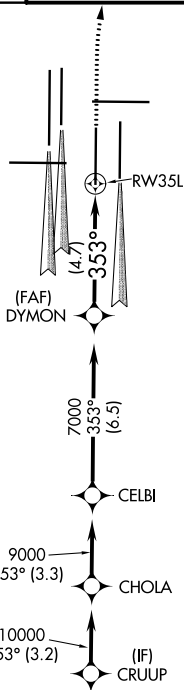

RADAR REQUIRED

ELEV 5434	D	TDZE 5434
-----------	----------	-----------

HIRL all Rwys
TDZ/CL Rwys 7, 16L, 16R, 17R, 26, 34L, 34R, 35L, 35R

DYMON	7000	10000	GLL
VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 71).			
7000	353°	RW35L	
GP 3.00°	TCH 57	4.7 NM	
CATEGORY	A	B	C
RNP 0.10 DA		5695/24	261 (300-1/2)
RNP 0.30 DA		5760/32	326 (400-5/8)
AUTHORIZATION REQUIRED			

SW-1, 11 JUL 2024 to 08 AUG 2024

SW-1, 11 JUL 2024 to 08 AUG 2024