RNAV (GPS) Y RWY 16L

DENVER INTL (DEN)

WAAS	APP CRS		
CH **99307**	**173°**	Rwy Idg	**12000**
W16A		TDZE	**5357**
		Apt Elev	**5434**

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 45°C (114°F). Simultaneous approach authorized with Rwy 17 L/R. DME/DME RNP -0.3 NA. LNAV procedure NA during simultaneous operations. For inoperative MALSR, increase LNAV/VNAV all Cats, and LNAV Cats C/D visibility to RVR 4500. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR

MISSED APPROACH: Climb to 5900 then climbing right turn to 10000 direct BINBE and hold, continue climb-in-hold to 10000.

D-ATIS	DENVER APP CON	DENVER TOWER	GND CON	CLNC DEL	CPDLC
ARR **125.6 379.9** DEP **134.025**	**119.3 307.3** (NORTH) **120.35 379.3** (SOUTH)	**135.3 351.95**	**121.35 379.175**	**118.75**	

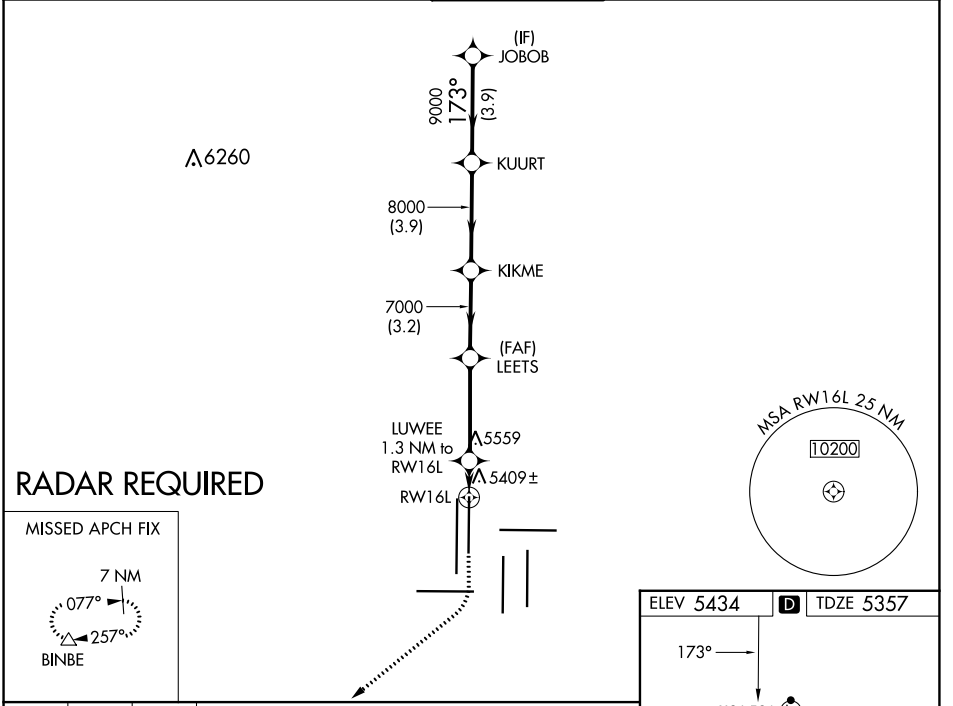

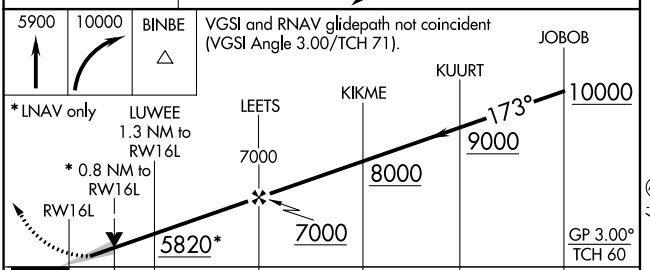

CATEGORY	A	B	C	D
LPV DA	5557/18	200 (200-½)		
LNAV/VNAV DA	5647/24	290 (300-½)		
LNAV MDA	5660/24	303 (300-½)		

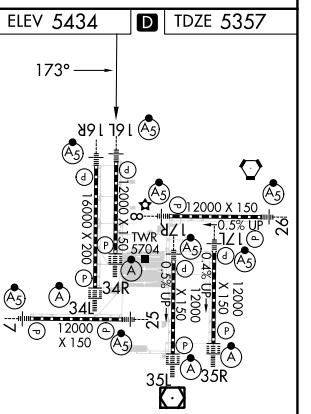

HIRL all Rwys
TDZ/CL Rwys 7, 16L, 16R, 17R, 26, 34L, 34R, 35L, 35R

SW-1, 11 JUL 2024 to 08 AUG 2024
SW-1, 11 JUL 2024 to 08 AUG 2024