WAAS CH 99341 W21A	APP CRS 214°	Rwy Idg 7000 TDZE 7003 Apt Elev 7014

RNAV (GPS) RWY 21
FLAGSTAFF PULLIAM (FLG)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19 °C (2°F) or above 44°C (111°F). DME/DME RNP-0.3 NA. For inop ALS, increase LPV all Cats visibility to ⅞ SM.

MALSR

MISSED APPROACH: Climb to 7500 then climbing left turn to 10800 direct HOXOL and hold.

ATIS	PHOENIX APP CON	FLAGSTAFF TOWER ★	GND CON	UNICOM
125.8	126.375 236.775	134.55 (CTAF) L 239.25	121.9	122.95

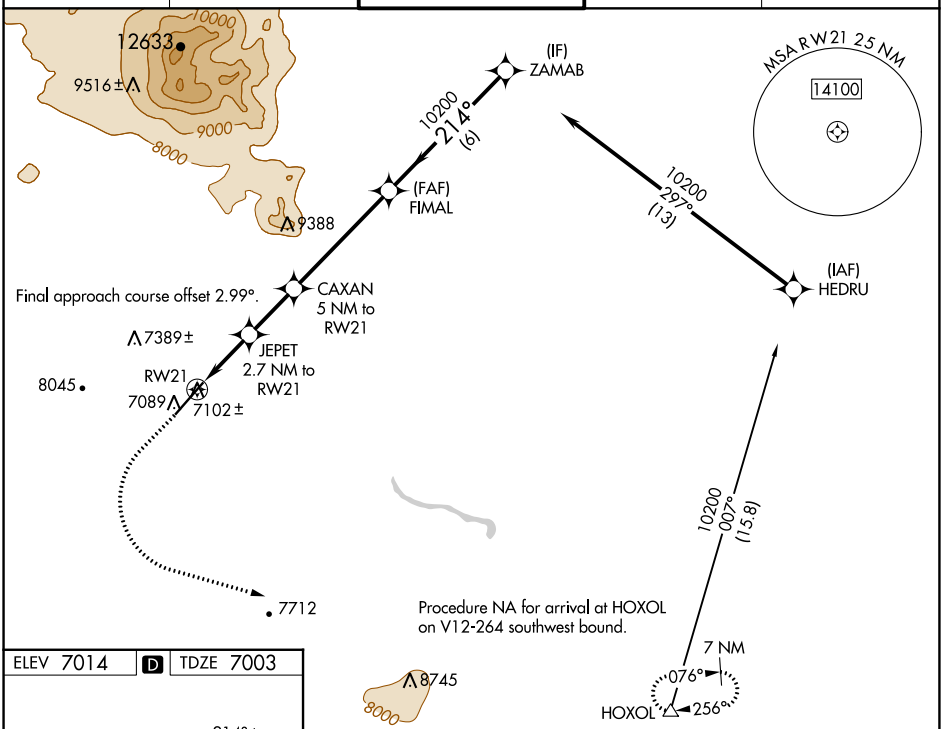

ELEV 7014 D TDZE 7003



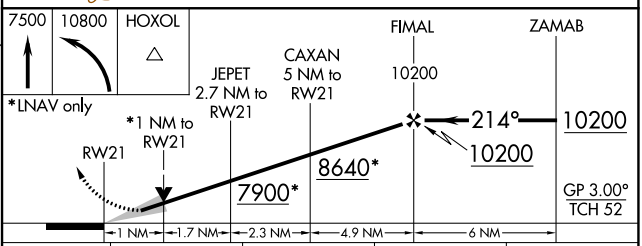

CATEGORY	A	B	C	D
LPV DA	7258-½ 255 (300-½)			
LNAV/VNAV DA	7319-⅝ 316 (400-⅝)			
LNAV MDA	7360-½ 357 (400-½)		7360-⅝ 357 (400-⅝)	
C CIRCLING	7520-1 506 (600-1)	7560-1 546 (600-1)	8100-3 1086 (1100-3)	8560-3 1546 (1600-3)

SW-4, 08 AUG 2024 to 05 SEP 2024
SW-4, 08 AUG 2024 to 05 SEP 2024