RNAV (RNP) Y RWY 9

GEORGE BUSH INTCNTL/HOUSTON (IAH)

APP CRS	Rwy Idg	10000
087°	TDZE	91
	Apt Elev	96

For uncompensated Baro-VNAV systems, procedure NA below -3°C (27°F) or above 54°C (130°F). GPS required. For inop MALSR, increase all Cats visibility to 1⅜ mile. Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR

MISSED APPROACH: Climb to 580 then climbing right turn to 3000 direct JEBOX and hold.

D-ATIS	HOUSTON APP CON	HOUSTON TOWER	GND CON	CLNC DEL	CPDLC
124.05	120.05 379.1 EAST 124.35 316.15 WEST	135.15 290.2	118.575	128.1	

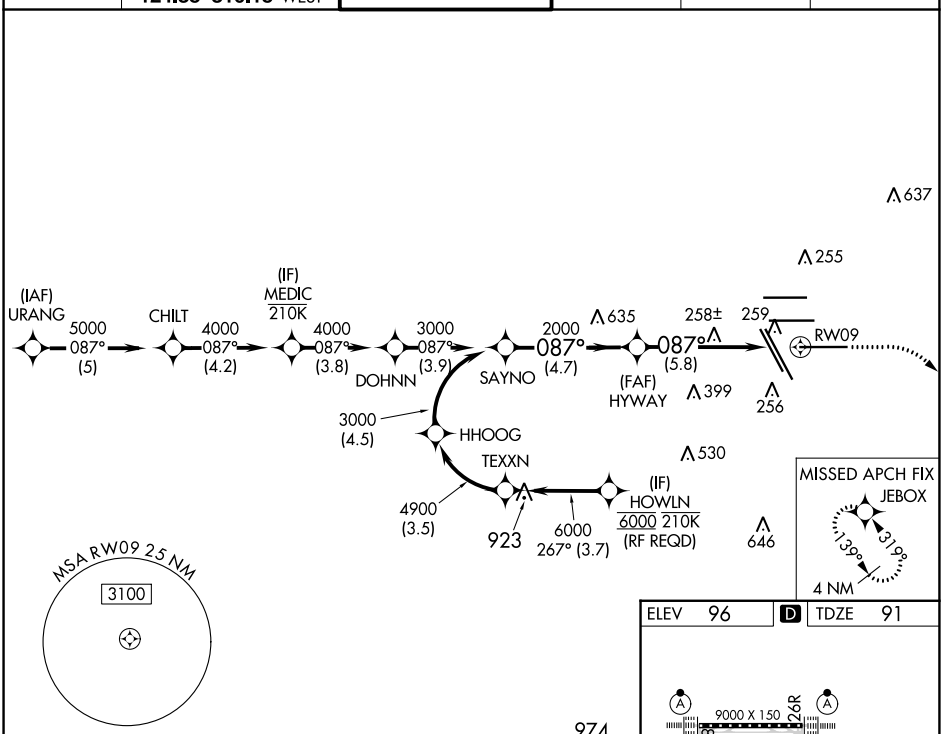

CATEGORY	A	B	C	D
RNP 0.30 DA	516/49 425 (500-1)			

AUTHORIZATION REQUIRED

TDZ/CL Rwys 8R, 8L, 15R, 26R, 26L, 27 and 33L
HIRL all Rwys

SC-5, 08 AUG 2024 to 05 SEP 2024
SC-5, 08 AUG 2024 to 05 SEP 2024