
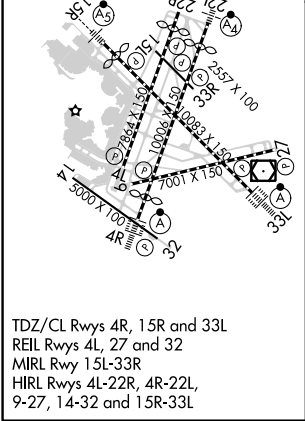


WAAS CH 45925 W22A	APP CRS 215°	Rwy Idg TDZE Apt Elev	8806 16 19
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) X RWY 22L
GENERAL EDWARD LAWRENCE LOGAN INTL (BOS)

RNP APCH - GPS. ▼ For inop ALS, increase LNAV/VNAV Cat D visibility to RVR 6000 and LNAV Cat D visibility to 1½ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 43°C.				MALSF A4	MISSED APPROACH: Climb to 3000 direct WINNI and hold.
D-ATIS 135.0	BOSTON APP CON 120.6 263.1	BOSTON TOWER 128.8 257.8 (WEST) 132.225 257.8 (EAST)	GND CON 121.75 121.9	CLNC DEL 121.65 257.8	CPDLC

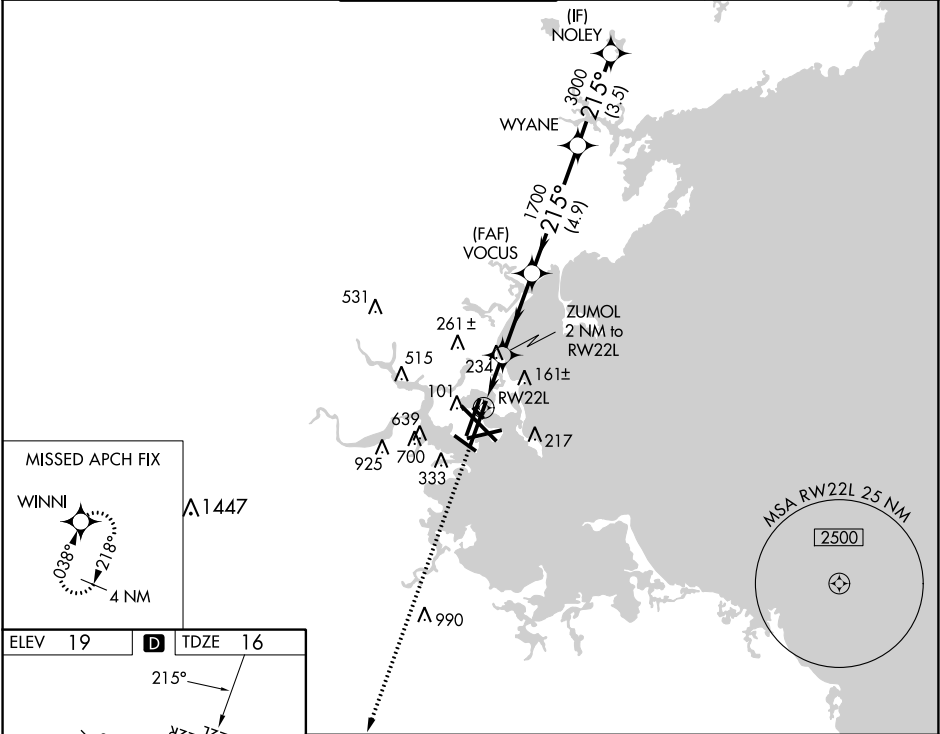

ELEV 19 D TDZE 16		3000 WINNI VGSB and RNAV glidepath not coincident (VGSB Angle 3.00/TCH 71).			
215°		ZUMOL 2 NM to RWY 22L VOCUS WYANE NOLEY			
1.4 NM to RWY 22L		700 1700 3000 4000			
1.4 NM 0.6 3.1 NM 4.9 NM 3.5 NM		GP 3.00° TCH 55			
CATEGORY	A	B	C	D	
LPV DA	216/40		200 (200-¾)		
LNAV/VNAV DA	408/50		392 (400-1)		
LNAV MDA	540/40	524 (600-¾)	540-1¼	524 (600-1¼)	