

D-ATIS
120.15
CLNC DEL
127.9
CPDLC
GND CON
121.75 348.6
LOVE TOWER
123.7 239.3
REGIONAL DEP CON
124.3 282.275 (North Props)
125.2 343.65 (South Props)

TOP ALTITUDE
Rwys 13L/R: 3000
Rwys 31L/R: 2000


TAKEOFF MINIMUMS

Rwys 13L/R: Standard with minimum climb of 500' per NM to 1200.
Rwys 31L/R: Standard with minimum climb of 500' per NM to 1000.

NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)

NOTE: RNAV 1.
NOTE: DME/DME/IRU or GPS required.
NOTE: RADAR required.
NOTE: Props only.
NOTE: ALIAN Transition: ATC assigned only.

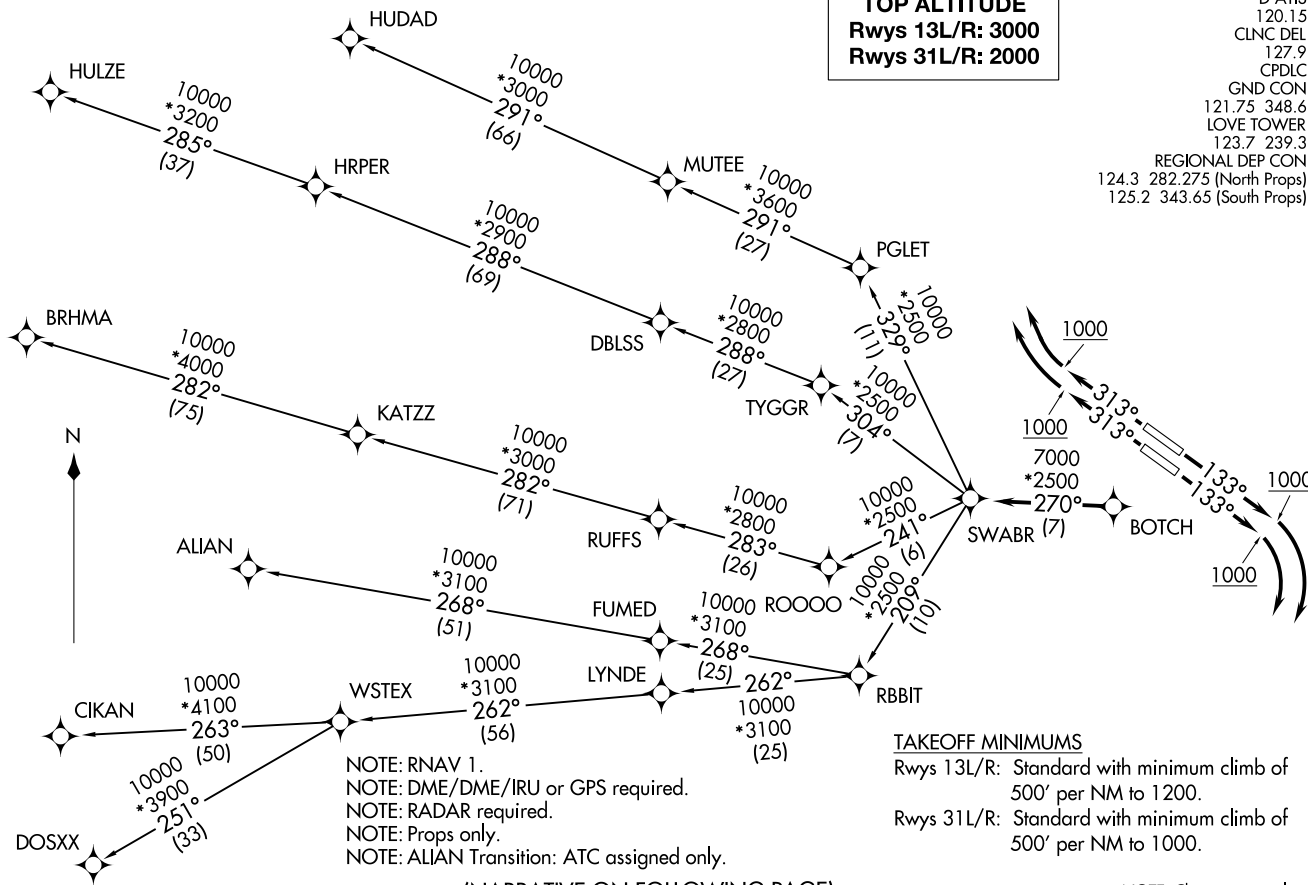



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 13L/R: Climb on heading 133° to 1000, thence. . . .
. . . .right turn heading 193° or as assigned by ATC, expect RADAR vectors to BOTCH,
then on track 270° to SWABR, then on (transition). Maintain 3000. Expect filed
altitude 10 minutes after departure.

TAKEOFF RUNWAYS 31L/R: Climb on heading 313° to 1000, thence. . . .
. . . .right turn heading 333° or as assigned by ATC, expect RADAR vectors to BOTCH,
then on track 270° to SWABR, then on (transition). Maintain 2000. Expect filed
altitude 10 minutes after departure.

- ALIAN TRANSITION (SWABR1.ALIAN)
- BRHMA TRANSITION (SWABR1.BRHMA)
- CIKAN TRANSITION (SWABR1.CIKAN)
- DOSXX TRANSITION (SWABR1.DOSXX)
- HUDAD TRANSITION (SWABR1.HUDAD)
- HULZE TRANSITION (SWABR1.HULZE)
- WSTEX TRANSITION (SWABR1.WSTEX)

SC-2, 05 SEP 2024 to 03 OCT 2024

SC-2, 05 SEP 2024 to 03 OCT 2024