



| | | | |
|-------------------------|------------------------|-----------------------------|---|
| WAAS CH 97722 | APP CRS 030° | Rwy Idg TDZE Apt Elev | 8999 1424 1430 |
|-------------------------|------------------------|-----------------------------|---|

RNAV (GPS) RWY 3


JOE FOSS FLD (FSD)

| | | | |
|--|--|-------|--|
| RNP APCH - GPS. | | MALSR | MISSED APPROACH: Climb to 4000 direct MOEUE and hold. |
| <p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cats C/D visibility to 1$\frac{1}{2}$ SM.</p> <p>▲ ASR</p> <p>❄ -31°C</p> | | | |

| | | | | |
|----------------------|--|---|-------------------------------|-------------------------|
| ATIS 126.6 | SIoux FALLS APP CON* 125.8 306.2 | SIoux FALLS TOWER* 118.3 (CTAF) 257.8 | GND CON 121.9 348.6 | UNICOM 122.95 |
|----------------------|--|---|-------------------------------|-------------------------|

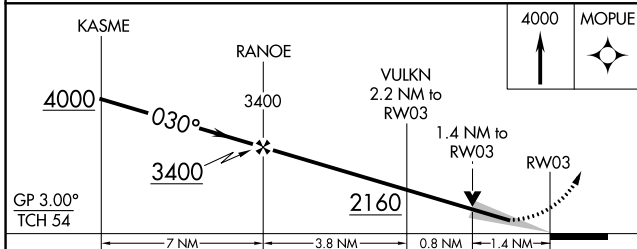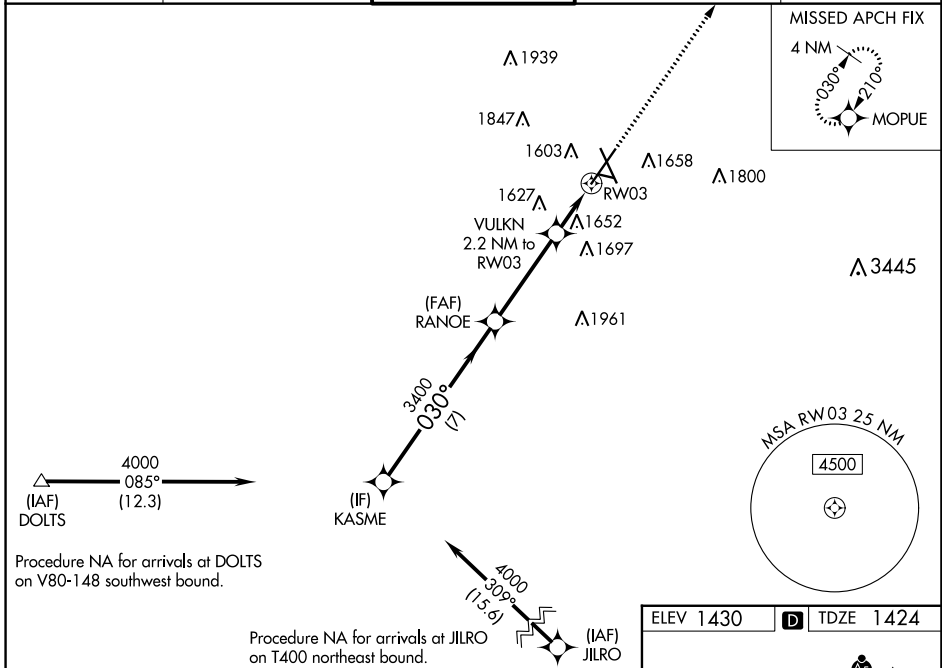

| CATEGORY | A | B | C | D |
|--------------|---------|---------------------------|--|--|
| LPV DA | 1674/24 | | 250 (300- $\frac{1}{2}$) | |
| LNAV/VNAV DA | 1741/24 | | 317 (400- $\frac{1}{2}$) | |
| LNAV MDA | 1920/24 | 496 (500- $\frac{1}{2}$) | 1920/50 | 496 (500-1) |
| CIRCLING | 1980-1 | 550 (600-1) | 2060-1 $\frac{3}{4}$ 630 (700-1 $\frac{3}{4}$) | 2200-2 $\frac{1}{2}$ 770 (800-2 $\frac{1}{2}$) |

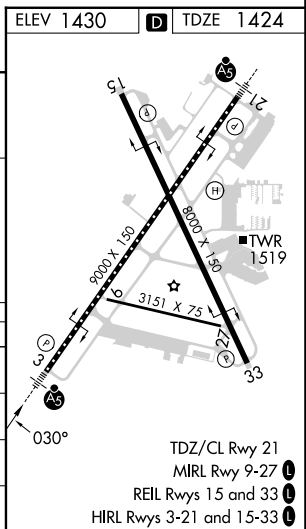

NC-1, 05 SEP 2024 to 03 OCT 2024

NC-1, 05 SEP 2024 to 03 OCT 2024