

WAAS CH 70714 W23A	APP CRS 233°	Rwy ldg TDZE Apt Elev	5590 5505 5507
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 23

FOUR CORNERS RGNL (FMN)


RNP APCH - GPS.

⚠

Baro-VNAV and VDP NA when using Durango altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling NA for Cat D southeast of Rwy 5 and south of Rwy 25. When local altimeter setting not received, use Durango altimeter setting and increase LPV DA to 5998 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 6274 feet and all visibilities 1 SM. Increase all MDAs 260 feet and LNAV visibilities Cat B ¼ SM, C/D ⅓ SM and Circling visibility Cat A/B ¼ SM and Cat C ½ SM.

MISSED APPROACH: Climb to 8000 direct EXZAR and on track 265° to HASIT and hold.

ATIS 127.15	DENVER CENTER 118.575 348.7	FARMINGTON TOWER* 118.9 (CTAF) 257.8	GND CON 121.7	UNICOM 122.95
-----------------------	---------------------------------------	--	-------------------------	-------------------------

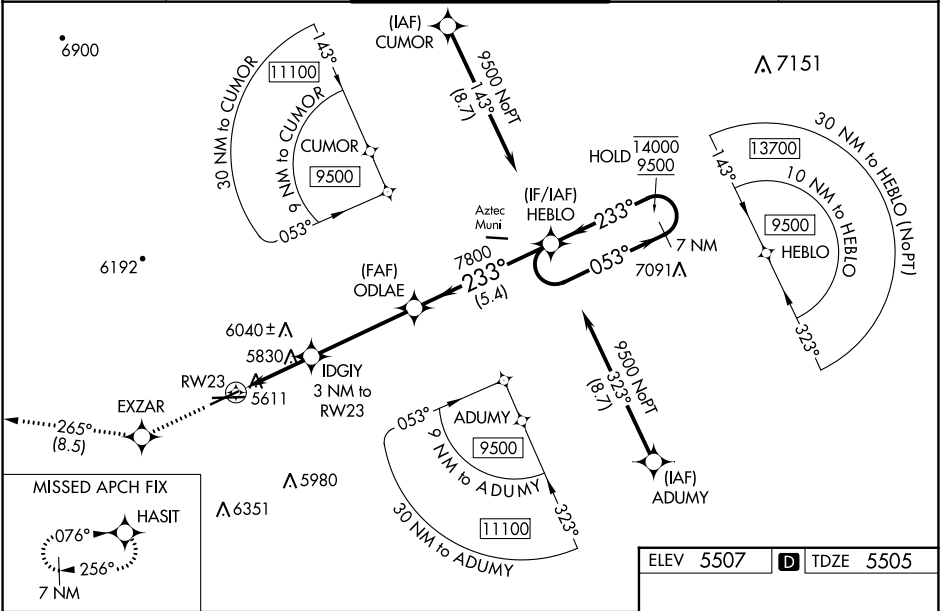

8000	EXZAR	HASIT	tr 265°
IDGIY 3 NM to RW23			
RW23 2 NM to RW23			
ODLAE 7800			
HEBLO 7 NM Holding Pattern			
GP 3.00° TCH 42			
CATEGORY A B C D			
LPV DA	5755-¾ 250 (300-¾)		
LNAV/VNAV DA	6031-1½ 526 (600-1½)		
LNAV MDA	6080-1 575 (600-1) 6080-1½ 575 (600-1½)		
CIRCLING	6100-1 593 (600-1) 6140-1 633 (700-1) 6380-2½ 873 (900-2½) 6400-3 893 (900-3)		

