


WAAS CH 97518 W25A	APP CRS 256°	Rwy Idg TDZE Apt Elev	6248 5507 5507
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 25
FOUR CORNERS RGNL (FMN)

RNP APCH-GPS.	MISSED APPROACH: Climb to 8000 direct HASIT and hold.
Baro-VNAV and VDP NA when using Durango altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling NA for Cat D southeast of Rwy 5 and south of Rwy 25. When local altimeter setting not received, use Durango altimeter setting and increase LPV DA to 5950 feet and all visibilities $\frac{1}{2}$ SM. Increase LNAV/VNAV DA to 6312 feet and all visibilities $\frac{1}{2}$ SM. Increase all MDAs 260 feet and LNAV visibilities Cat C/D $\frac{3}{4}$ SM, and Circling visibility Cat B $\frac{1}{4}$ SM and Cat C $\frac{1}{2}$ SM.	

ATIS 127.15	DENVER CENTER 118.575 348.7	FARMINGTON TOWER ★ 118.9 (CTAF) 257.8	GND CON 121.7	UNICOM 122.95
-----------------------	---------------------------------------	---	-------------------------	-------------------------

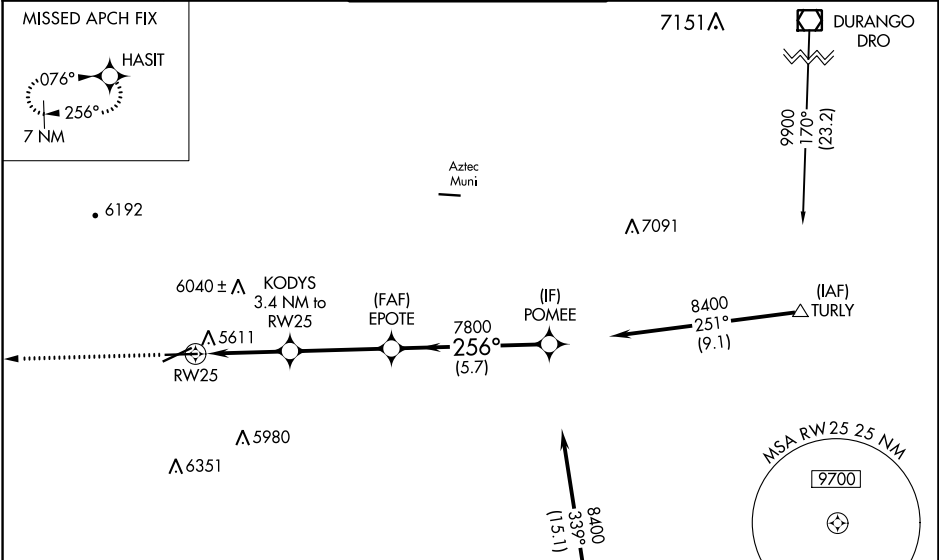

ELEV 5507	D	TDZE 5507
-----------	---	-----------

8000 HASIT		KODYS 3.4 NM to RW25	
5570★		EPOTE 7800	
6704 X 100		POMEE 8400	
TWR 5569		GP 3.00°	
256°		TCH 56	
REIL Rws 23 and 25		CATEGORY A	
MIRL Rws 5-23 and 7-25		LPV DA 5707- $\frac{3}{4}$ 200 (200- $\frac{3}{4}$)	
		LNAV/VNAV DA 6069-1 $\frac{5}{8}$ 562 (600-1 $\frac{5}{8}$)	
		LNAV MDA 5880-1 373 (400-1)	
		CIRCLING 6020-1 513 (600-1) 6140-1 633 (700-1) 6380-2 $\frac{1}{2}$ 873 (900-2 $\frac{1}{2}$) 6400-3 893 (900-3)	