WAAS	APP CRS		
CH **65806**	**230°**	Rwy Idg	**6200**
W23A		TDZE	**262**
		Apt Elev	**262**

RNAV (GPS) RWY 23

JONESBORO MUNI (JBR)

RNP APCH.

Circling NA northwest of Rwy 5-23. Circling Rwy 31 NA at night. Baro-VNAV and VDP NA when using Walnut Ridge altimeter setting. Rwy 23 helicopter visibility reduction below ¾ SM NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C.
For inop ALS, increase LPV Cat A/B visibility to ⅞ SM. Inop table does not apply to LNAV/VNAV.
For inop ALS when using Walnut Ridge altimeter setting, increase LPV Cat A/B visibility to 1 SM.
When using Walnut Ridge altimeter setting, inop table does not apply to LNAV/VNAV.
When local altimeter setting not received, use Walnut Ridge altimeter setting: increase LPV DA to 600 feet, LNAV/VNAV DA to 630 feet and all visibilities ⅛ SM; increase all MDAs 60 feet and LNAV Cat C/D and Circling Cat C visibility ¼ SM.

ODALS

MISSED APPROACH: Climb to 2300 direct YIGUY and hold.

ASOS	MEMPHIS CENTER	UNICOM
118.525	**120.075 289.4**	**123.0** (CTAF) L

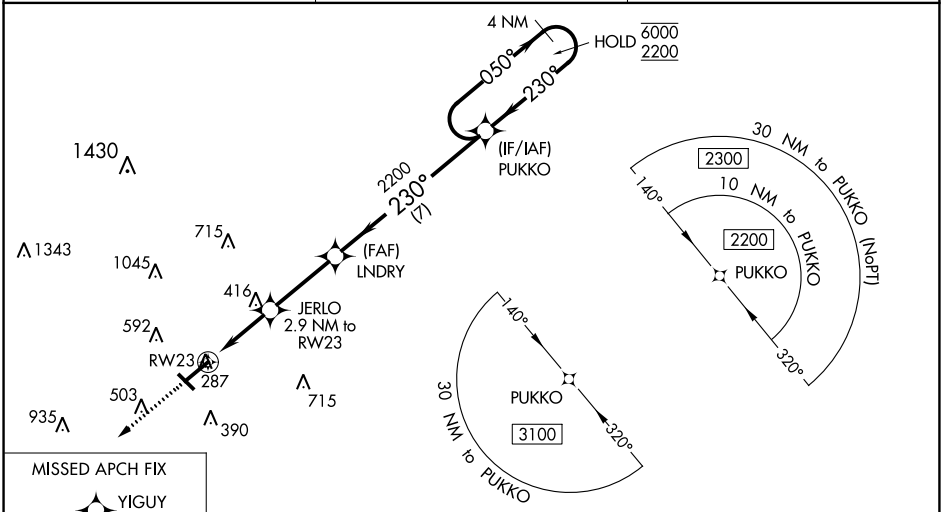



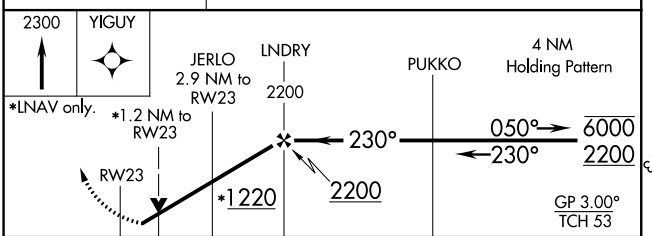

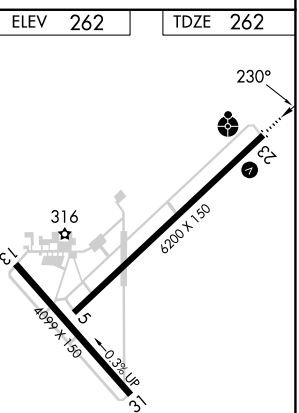

CATEGORY	A	B	C	D
LPV DA	546-¾ 284 (300-¾)			
LNAV/VNAV DA	576-⅞ 314 (400-⅞)			
LNAV MDA	680-¾ 418 (500-¾)		680-1 418 (500-1)	
CIRCLING	740-1 478 (500-1)		820-1½ 558 (600-1½)	1080-2¾ 818 (900-2¾)

MIRL Rwys 5-23 and 13-31 L

SC-1, 05 SEP 2024 to 03 OCT 2024
SC-1, 05 SEP 2024 to 03 OCT 2024