RNAV (GPS) RWY 4

NEW CENTURY AIRCENTER (IXD)

WAAS	APP CRS	Rwy Idg	5132
CH 86439	043°	TDZE	1080
W04A		Apt Elev	1087

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (-2°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Johnson County Exec altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Johnson County Exec altimeter setting: increase LPV DA to 1348 feet and LNAV/VNAV DA to 1448 feet and all MDA 20 feet; increase LNAV Cat C/D visibility ⅛ mile.

MISSED APPROACH: Climb to 3100 direct FALOV and hold.

ASOS	KANSAS CITY APP CON	NEW CENTURY TOWER ★	GND CON	UNICOM
135.325	118.9 251.075	133.0 (CTAF) L	124.3	122.95

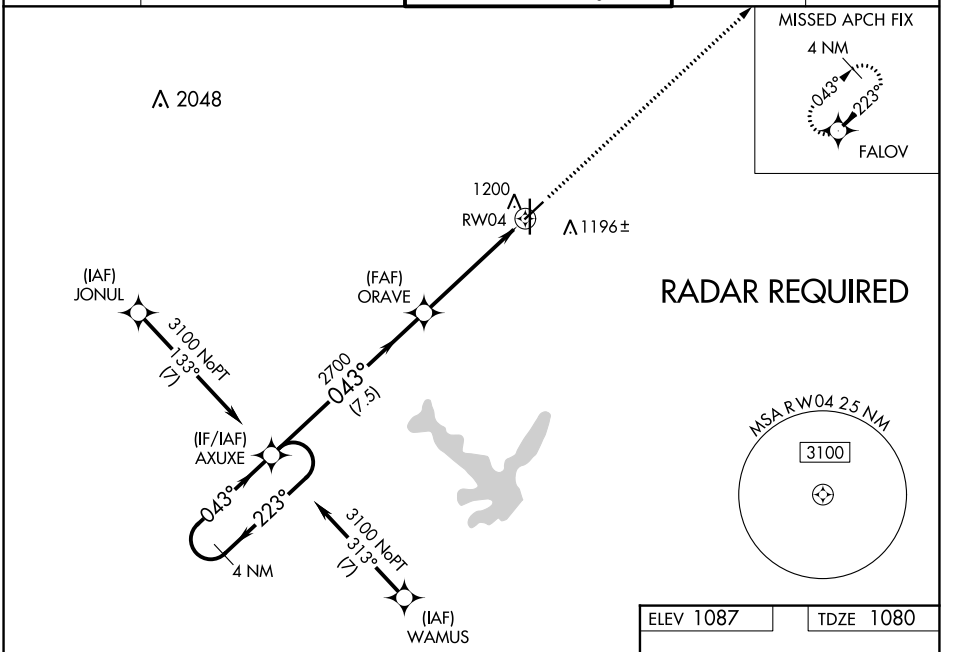

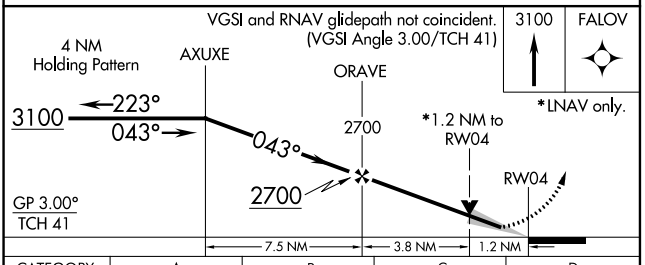

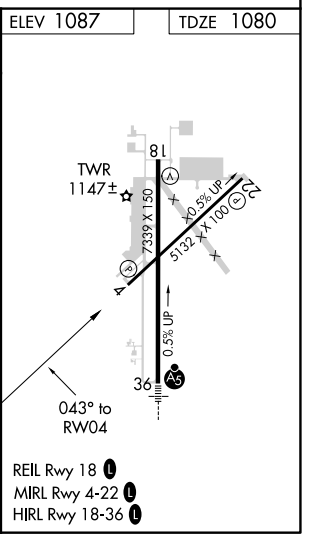

CATEGORY	A	B	C	D
LPV DA	1330-1 250 (300-1)			
LNAV/VNAV DA	1430-1¼ 350 (400-1¼)			
LNAV MDA	1500-1 420 (500-1)		1500-1⅛ 420 (500-1⅛)	
C CIRCLING	1560-1 473 (500-1)		1580-1½ 493 (500-1½)	1640-2 553 (600-2)

NC-2, 03 OCT 2024 to 31 OCT 2024
NC-2, 03 OCT 2024 to 31 OCT 2024