

WAAS CH 97322 W27A	APP CRS 268°	Rwy Idg TDZE Apt Elev	9912 10 36
----------------------------------------	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 27L

PHILADELPHIA INTL (PHL)




RNP APCH - GPS.

▽ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000.
▲ * RVR 1800 authorized with use of FD or AP or HUD to DA.




MISSED APPROACH: Climb to 500 then climbing left turn to 3000 direct WUDRR and hold.

D-ATIS ARR 133.4 DEP 135.925	PHILADELPHIA APP CON 124.35 319.15	PHILADELPHIA TOWER (Rwys 9L/27R, 8/26 and 17/35) 118.5 327.05 135.1 327.05 (Rwy 9R/27L)	GND CON 121.9 348.6	CLNC DEL 118.85 348.6
--------------------------------------------------	----------------------------------------------	----------------------------------------------------------------------------------------------------------------	-------------------------------	---------------------------------

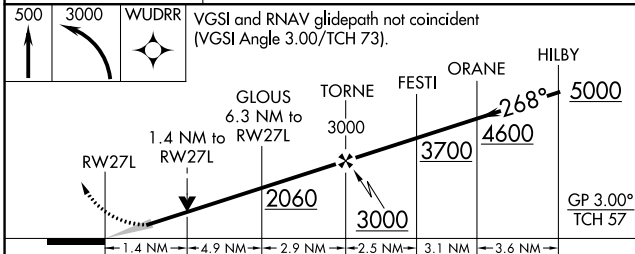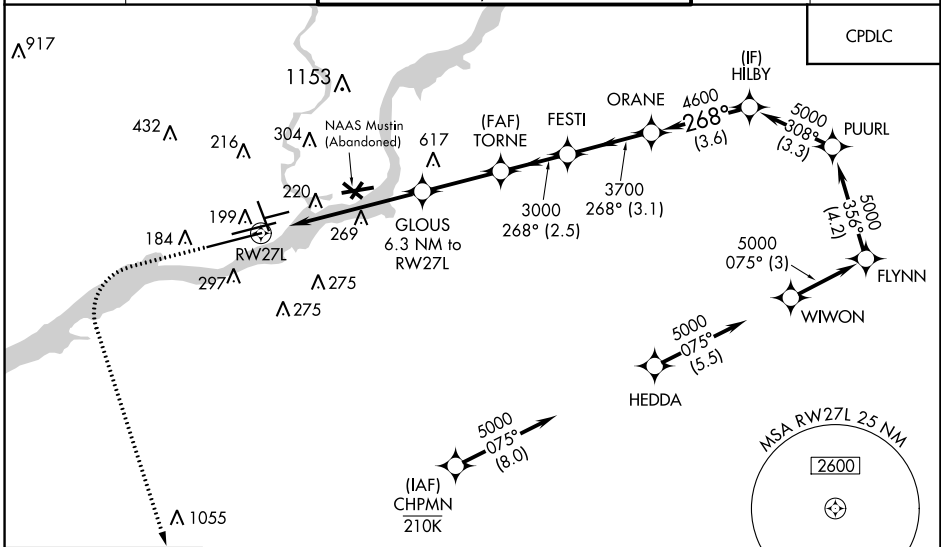

CATEGORY	A	B	C	D
LPV DA*		210/24	200 (200-1/2)	
LNAV/DA VNAV		422/40	412 (400-3/4)	
LNAV MDA	540/24	530 (600-1/2)	540/55	530 (600-1)
CIRCLING	540-1 504 (600-1)	600-1 564 (600-1)	620-1 1/2 584 (600-1 1/2)	720-2 1/4 684 (700-2 1/4)

ELEV 36	D TDZE 10
---------	------------------



NE-4, 03 OCT 2024 to 31 OCT 2024

NE-4, 03 OCT 2024 to 31 OCT 2024