



WAAS CH 42843 W35A	APP CRS 344°	Rwy Idg TDZE Apt Elev	9272 4227 4231
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 35

SALT LAKE CITY INTL (SLC)

RNP APCH - GPS.		MALSR	MISSED APPROACH: Climb to 9000 direct KNOBY and on track 334° to OGD VORTAC and hold.	
▼ For inop ALS, increase LP Cat C, D and E visibility to RVR 5500, increase LNAV Cat E visibility to 1½ SM.				

D-ATIS 124.75 125.625	SALT LAKE CITY APP CON 125.7 284.6	SALT LAKE CITY TOWER 118.3 257.8	GND CON 121.9 348.6	CLNC DEL 127.3 379.975	CPDLC
---------------------------------	--	--	-------------------------------	----------------------------------	-------

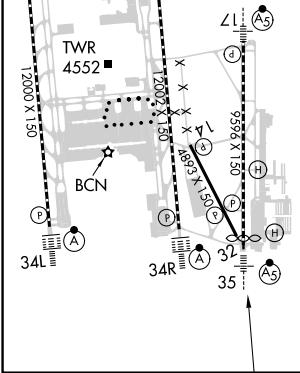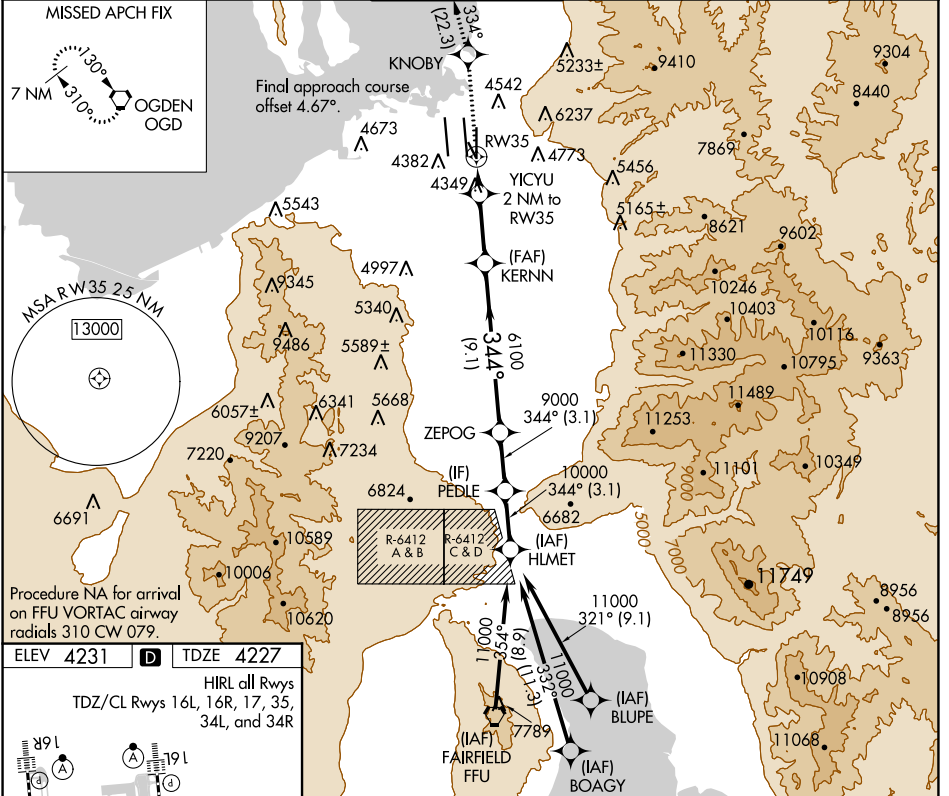

ELEV 4231	D	TDZE 4227	HIRL all Rwys TDZ/CL Rwys 16L, 16R, 17, 35, 34L, and 34R		
9000 KNOBY tr 334° OGD VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 74).		HLMET PEDLE ZEPOG KERNN YICYU 2 NM to RW35 0.9 NM to RW35 RW35 4900 6100 9000 11000 344° 3.00° TCH 55			
0.9 1.1 NM -3.7 NM -9.1 NM -3.1 NM -3.1 NM					
CATEGORY	A	B	C	D	E
LP MDA	4600/24	373 (400-½)	4600/35	373 (400-½)	
LNAV MDA	4760/24	533 (600-½)	4760/55	533 (600-1)	

SW-4, 03 OCT 2024 to 31 OCT 2024

SW-4, 03 OCT 2024 to 31 OCT 2024