

# HI-ILS Y or LOC Y RWY 20R

|   |                         |   |
|---|-------------------------|---|
| LOC/DME I-FAI<br><b>110.3</b><br>Chan <b>40</b> | APCH CRS<br><b>203°</b> | Rwy ldg <b>11,050</b><br>TDZE <b>439</b><br>Arprt Elev <b>439</b> |
|---|-------------------------|---|

[USAF]

FAIRBANKS INTL (PAFA)


DME required for procedure entry.



MISSED APPROACH: Climb to 8000 on heading 203° and FAI VORTAC R-157 to 23 DME, arc northbound to JAVAH/FAI VORTAC 23 DME and hold.

\* When ALS inop, increase CAT E RVR to 40 and vis to 3/4 mile.  
\*\* When ALS inop, increase CAT E vis to 1 3/8 miles.  
\*\*\* Circling not authorized W of Rwy 2L-20R.  
Circling not authorized to Rwy 2W-20W.



|                      |                                |                             |                         |                          |
|----------------------|--------------------------------|-----------------------------|-------------------------|--------------------------|
| ATIS<br><b>124.4</b> | APP CON<br><b>125.35 363.2</b> | TOWER<br><b>118.3 257.8</b> | GND CON<br><b>121.9</b> | CLNC DEL<br><b>127.6</b> |
|----------------------|--------------------------------|-----------------------------|-------------------------|--------------------------|

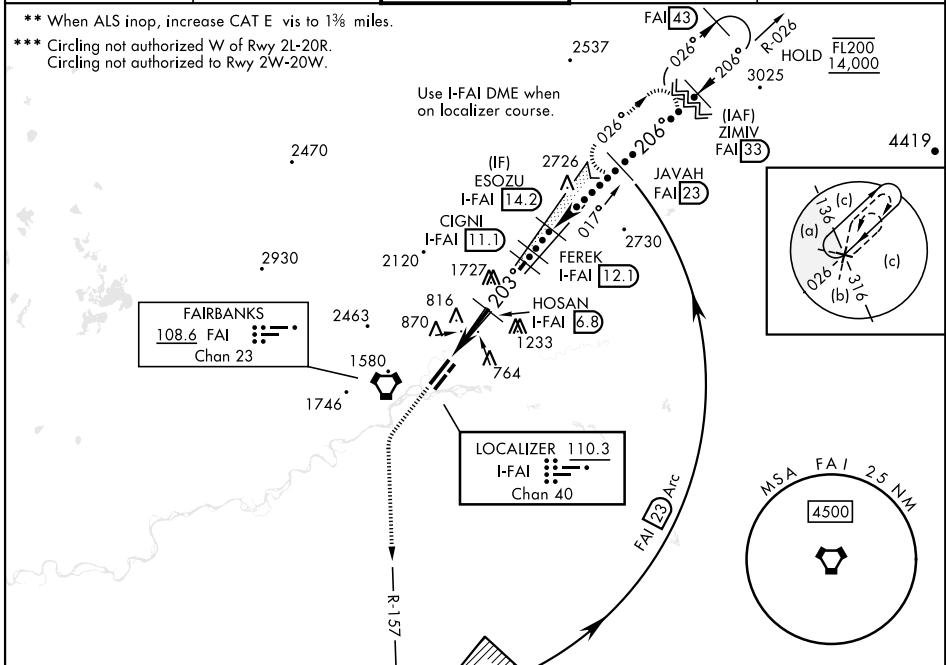

AK, 05 SEP 2024 to 31 OCT 2024

AK, 05 SEP 2024 to 31 OCT 2024

EMERG SAFE ALT 100 NM 16,100

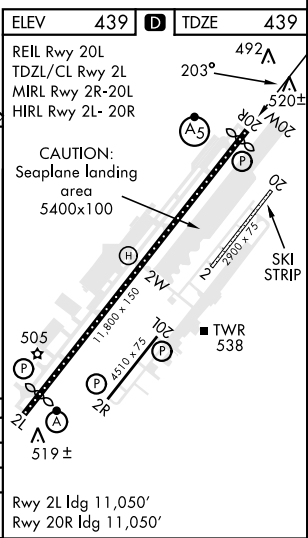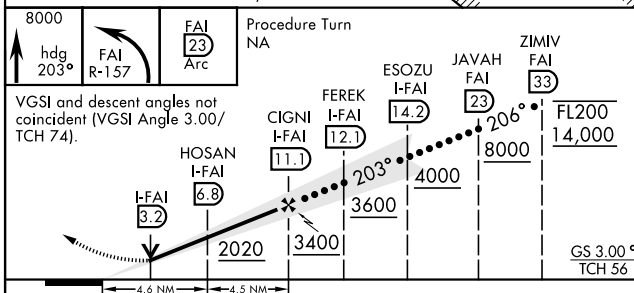

|             |                            |                       |                             |                   |
|-------------|----------------------------|-----------------------|-----------------------------|-------------------|
| 8000        | hdg 203°                   | FAI R-157             | FAI 23 Arc                  | Procedure Turn NA |
| 2020        | 3400                       | 4000                  | 8000                        | FL200 14,000      |
| 4.6 NM      | 4.5 NM                     |                       |                             | GS 3.00° TCH 56   |
| CATEGORY    | C                          | D                     | E                           |                   |
| S-ILS 20R** | 639/24                     | 200 (200-1/2)         |                             |                   |
| S-LOC 20R** | 880/45                     | 441 (500-7/8)         |                             |                   |
| CIRCLING*** | 900-1 1/2<br>461 (500-1/2) | 1020-2<br>581 (600-2) | 1060-2 1/4<br>621 (700-2/4) |                   |

# HI-ILS Y or LOC Y RWY 20R