
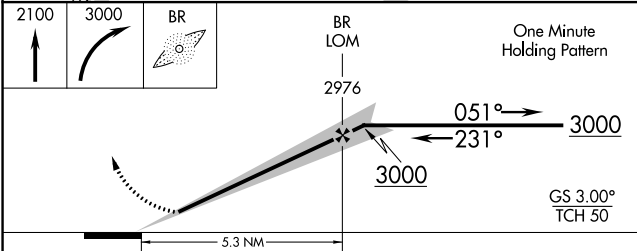


LOC I-BRD 109.9	APP CRS 231°	Rwy Idg 6512 TDZE 1224 Apt Elev 1232
---------------------------	------------------------	---

ILS or LOC RWY 23
BRainerd Lakes RGNL (BRD)

ADF required. When local altimeter setting not received, use Aitkin altimeter setting and increase all DAs 52 feet and all MDAs 60 feet. Increase S-LOC Cat C visibility to 1 SM and Circling Cat D visibility to 2¼ SM. MALSRR AS <td> MISSED APPROACH: Climb to 2100 then climbing right turn to 3000 direct LAREW LOM and hold. </td>	MISSED APPROACH: Climb to 2100 then climbing right turn to 3000 direct LAREW LOM and hold.
--	---

ASOS 126.775	MINNEAPOLIS CENTER 118.05 239.0	UNICOM 122.7 (CTAF)
------------------------	---	-------------------------------

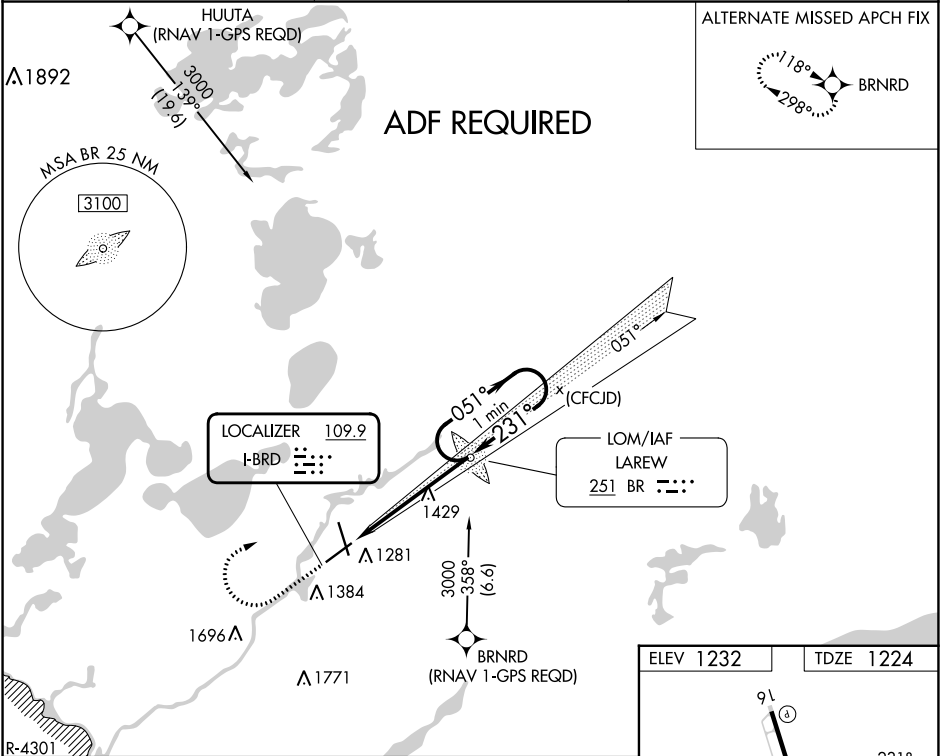

CATEGORY	A	B	C	D
S-ILS 23	1424-½ 200 (200-½)			
S-LOC 23	1680-½ 456 (500-½)	1680-¾ 456 (500-¾)	1680-1 456 (500-1)	
CIRCLING	1760-1 528 (600-1)	1760-1½ 528 (600-1½)	1860-2 628 (700-2)	

