

|   |                        |   |
|---|------------------------|---|
| LOC/DME I-ABU<br><b>111.75</b><br>Chan 54 (Y) | APP CRS<br><b>273°</b> | Rwy ldg <b>7500</b><br>TDZE <b>664</b><br>Apt Elev <b>680</b> |
|---|------------------------|---|

# ILS or LOC RWY 27R

CHICAGO O'HARE INTL (ORD)



RNAV-1 GPS or RADAR required for procedure entry. RADAR or DME required.

ALSf-2

MISSED APPROACH: Climb to 1100 then climbing right turn to 4000 direct OBK VOR/DME and hold, continue climb-in-hold to 4000.

Simultaneous approach authorized.

|  |   |                                     |  |   |                          |       |
|--|---|-------------------------------------|--|---|--------------------------|-------|
| D-ATIS<br><b>135.4</b><br><b>282.225</b> | CHICAGO APP CON<br><b>119.0 292.125</b> | O'HARE TOWER<br><b>128.15 348.0</b> | <b>124.125</b> (TWR NORTH)<br><b>118.05</b> (TWR SOUTH)<br><b>226.675</b> (ALL TWRs) | GND CON (TWR CENTER)<br><b>121.75</b> (OBND)<br><b>121.9</b> (IBND) | CLNC DEL<br><b>121.6</b> | CPDLC |
|--|---|-------------------------------------|--|---|--------------------------|-------|

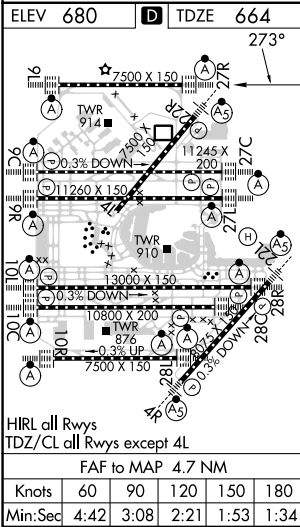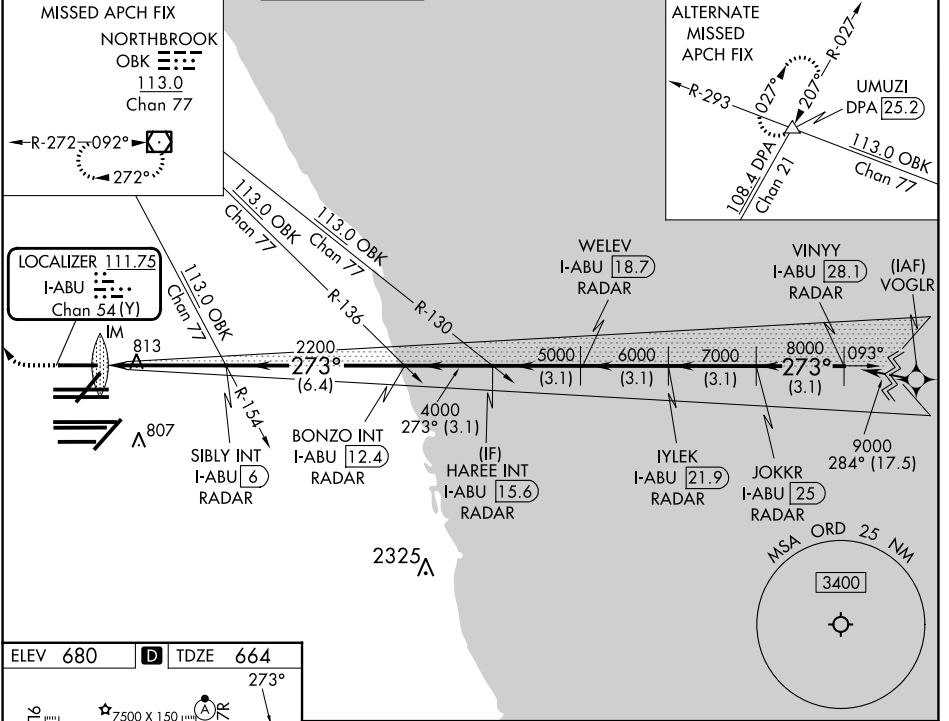

|            |            |                         |                            |                       |                            |                        |                      |                        |
|------------|------------|-------------------------|----------------------------|-----------------------|----------------------------|------------------------|----------------------|------------------------|
| 1100       | 4000       | OBK                     |                            |                       |                            |                        |                      |                        |
| *LOC only. |            |                         |                            |                       |                            |                        |                      |                        |
| I-ABU 1.4  | *I-ABU 2.6 | SIBLY INT I-ABU 6 RADAR | BONZO INT I-ABU 12.4 RADAR | WEEV I-ABU 18.7 RADAR | HAREE INT I-ABU 15.6 RADAR | IYLEK I-ABU 21.9 RADAR | JOKKR I-ABU 25 RADAR | VINYV I-ABU 28.1 RADAR |
| 2200       | 4000       | 5000                    | 6000                       | 7000                  | 8000                       | 9000                   | GS 3.00° TCH 55      |                        |
| 0.2        | 1.0        | -3.4 NM                 | -6.4 NM                    | 3.1 NM                | 3.1 NM                     | 3.1 NM                 | 3.1 NM               | 3.1 NM                 |
| CATEGORY   | A          |                         | B                          |                       | C                          |                        | D                    |                        |
| S-ILS 27R  | 864/18     |                         | 200 (200-1/2)              |                       |                            |                        |                      |                        |
| S-LOC 27R  | 1120/24    |                         | 456 (500-1/2)              |                       | 1120/45                    |                        | 456 (500-7/8)        |                        |