WAAS	APP CRS	Rwy Idg	12246
CH 48904	093°	TDZE	672
W10A		Apt Elev	680

RNAV (GPS) RWY 10L
CHICAGO O'HARE INTL (ORD)

RADAR required for procedure entry. RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 4000 direct XURXU and on track 161° to CGT VORTAC and hold.

D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON	(TWR CENTER)	CLNC DEL	CPDLC
135.4 282.225	119.0 292.125	132.7 348.0	124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRS)	121.75 (OBND) 121.9 (IBND)	121.6	

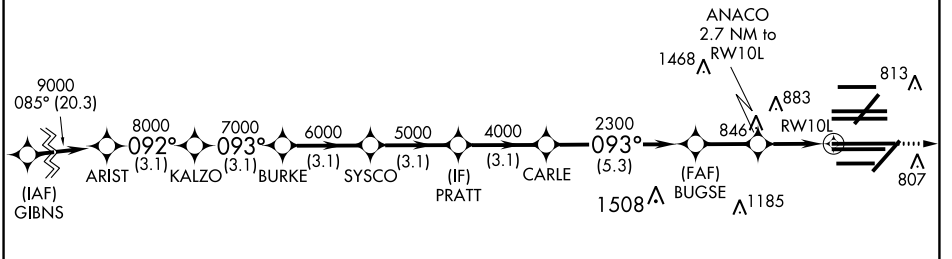





ELEV	680	D	TDZE	672

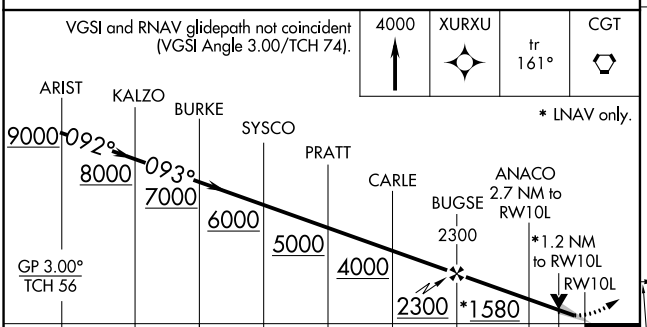

CATEGORY	A	B	C	D
LPV DA	872/18 200 (200-½)			
LNAV/VNAV DA	1062/35 390 (400-⅝)			
LNAV MDA	1120/24 448 (500-½)		1120/45 448 (500-⅞)	

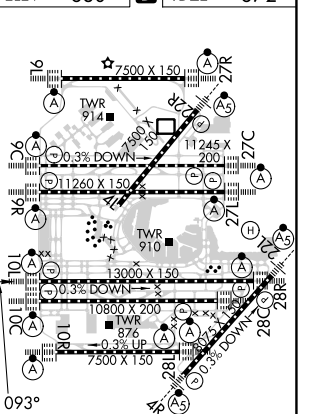

EC-3, 31 OCT 2024 to 28 NOV 2024
EC-3, 31 OCT 2024 to 28 NOV 2024