

# RNAV (GPS) PRM Y RWY 10R

(CLOSE PARALLEL)


CHICAGO O'HARE INTL (ORD)

WAAS CH <b>77937</b> <b>W10D</b>	APP CRS <b>090°</b>	Rwy Idg TDZE Apt Elev	<b>7500</b> <b>680</b> <b>680</b>
--	------------------------	-----------------------------	---

RNP APCH.  
 Simultaneous approach authorized. Dual VHF comm required. See additional requirements on AAUP. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to 1 3/8 SM.

ALS-2  
 MISSED APPROACH: Climb to 1200 then climbing right turn to 4000 direct DPA VOR/DME and hold.


D-ATIS <b>135.4</b> <b>282.225</b>	CHICAGO APP CON <b>119.0 292.125</b>	O'HARE TOWER <b>133.0 348.0</b> <b>PRM 128.05</b>	GND CON (TWR CENTER) <b>124.125</b> (TWR NORTH) <b>118.05</b> (TWR SOUTH) <b>226.675</b> (ALL TWRs)	<b>121.75</b> (OBND) <b>121.9</b> (IBND)	CLNC DEL <b>121.6</b>	CPDLC
--	---	---	--	---	--------------------------	-------

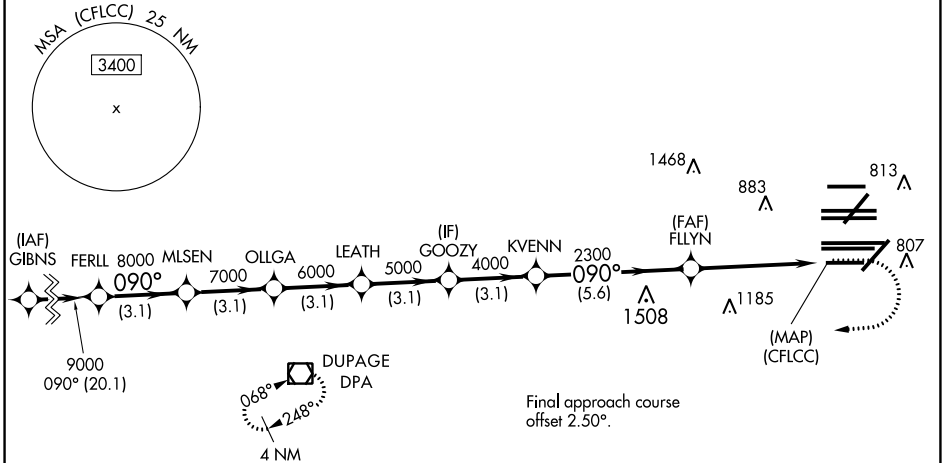

EC-3, 31 OCT 2024 to 28 NOV 2024

EC-3, 31 OCT 2024 to 28 NOV 2024

	ELEV 680	TDZE 680	
	1200	4000	DPA
FERLL	9000	090°	
MLSN	8000		
OLLGA	7000		
LEATH	6000		
GOOZY	5000		
KVENN	4000		
FLLYN	2300	(CFLCC)	
	3.1 NM	3.1 NM	3.1 NM
	3.1 NM	3.1 NM	5.6 NM
			4.9 NM
CATEGORY	A	B	C
LPV	DA	930/24	250 (300-1/2)
LNAV/VNAV	DA	1157/50	477 (500-1)

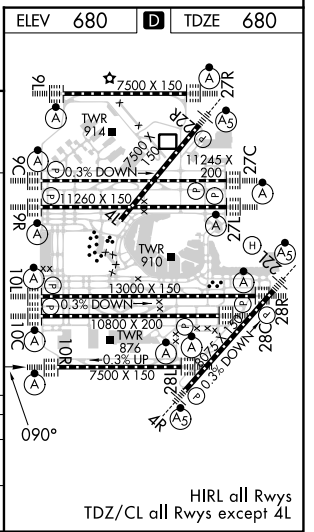

# RNAV (GPS) PRM Y RWY 10R (CLOSE PARALLEL)