ILS or LOC RWY 17R

LOUISVILLE MUHAMMAD ALI INTL (SDF)

LOC/DME I-SNU	APP CRS	Rwy Idg 10000
110.3	170°	TDZE 485
Chan 40		Apt Elev 501

RADAR required for procedure entry at CWAYN.
DME or RADAR required.

Simultaneous approach authorized. Circling Rwy 11 NA at night.
For inop ALS, increase S-LOC 17R Cat C/D visibility to RVR 6000.

MALSR

MISSED APPROACH: Climb to 1600 then climbing right turn to 4000 on heading 275° and on IIU VORTAC R-279 to DAMEN INT/24.5 DME and hold.

D-ATIS	LOUISVILLE APP CON	LOUISVILLE TOWER	GND CON	CLNC DEL	CPDLC
118.725	132.075 327.0	124.2 257.8	121.7 348.6	126.1 275.8	

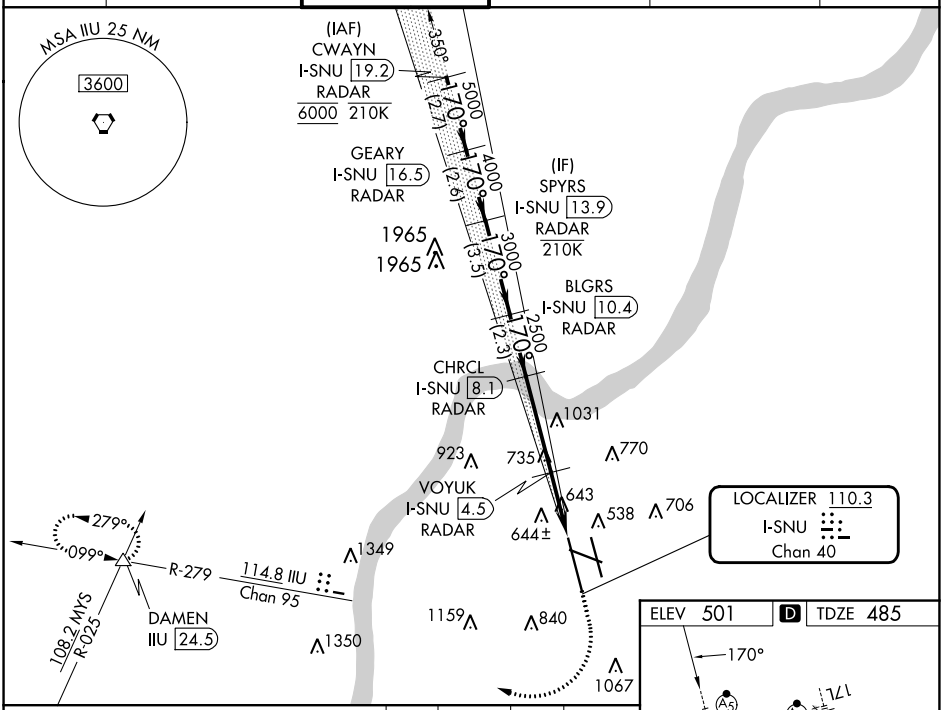

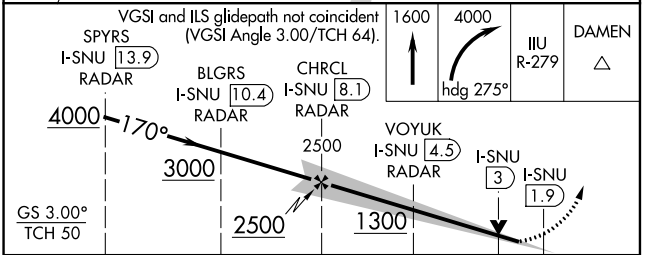

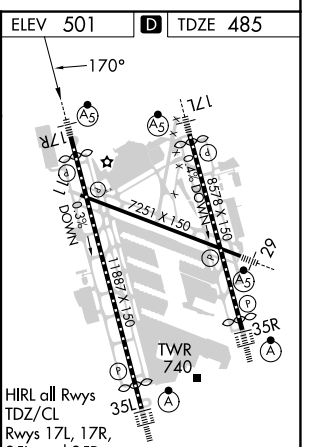

CATEGORY	A	B	C	D
S-ILS 17R	685/18 200 (200-½)			
S-LOC 17R	900/24 415 (400-½)		900/40 415 (400-¾)	
C CIRCLING	1040-1 539 (600-1)	1140-1 639 (700-1)	1160-1¾ 659 (700-1¾)	1400-3 899 (900-3)

HIRL all Rwys
TDZ/CL
Rwys 17L, 17R, 35L, and 35R

FAF to MAP 6.2 NM

Knots	60	90	120	150	180
Min:Sec	6:12	4:08	3:06	2:29	2:04

SE-1, 31 OCT 2024 to 28 NOV 2024
SE-1, 31 OCT 2024 to 28 NOV 2024