




# ILS or LOC RWY 2C

NASHVILLE INTL (BNA)

|                            |                        |                        |
|----------------------------|------------------------|------------------------|
| LOC I-EZN<br><b>110.75</b> | APP CRS<br><b>021°</b> | Rwy Idg<br><b>7601</b> |
|                            |                        | TDZE<br><b>587</b>     |
|                            |                        | Apt Elev<br><b>599</b> |

|   |           |  |
|---|-----------|--|
| DME or RADAR required.  | MALSR<br> | MISSED APPROACH: Climb to 1300 then climbing left turn to 4000 on BNA VORTAC R-016 to TANDS INT/BNA 24.7 and hold. |
| <p>▼ Simultaneous approach authorized. For inop ALS, increase S-LOC 2C Cats C and D visibility to RVR 6000. DME from BNA VORTAC.</p> <p>▲ Simultaneous reception of I-EZN and BNA DME required. #RVR 1800 authorized with the use of FD or AP or HUD to DA.</p> |           |  |

|                        |   |                                       |                               |                           |       |
|------------------------|---|---------------------------------------|-------------------------------|---------------------------|-------|
| D-ATIS<br><b>135.1</b> | NASHVILLE APP CON<br><b>118.4 360.7</b> | NASHVILLE TOWER<br><b>118.6 257.8</b> | GND CON<br><b>121.9 348.6</b> | CLNC DEL<br><b>126.05</b> | CPDLC |
|------------------------|---|---------------------------------------|-------------------------------|---------------------------|-------|

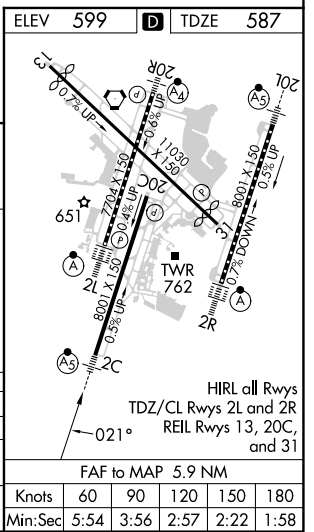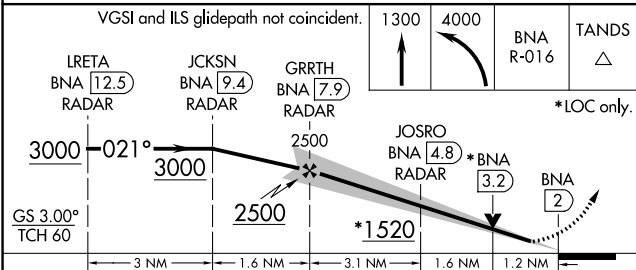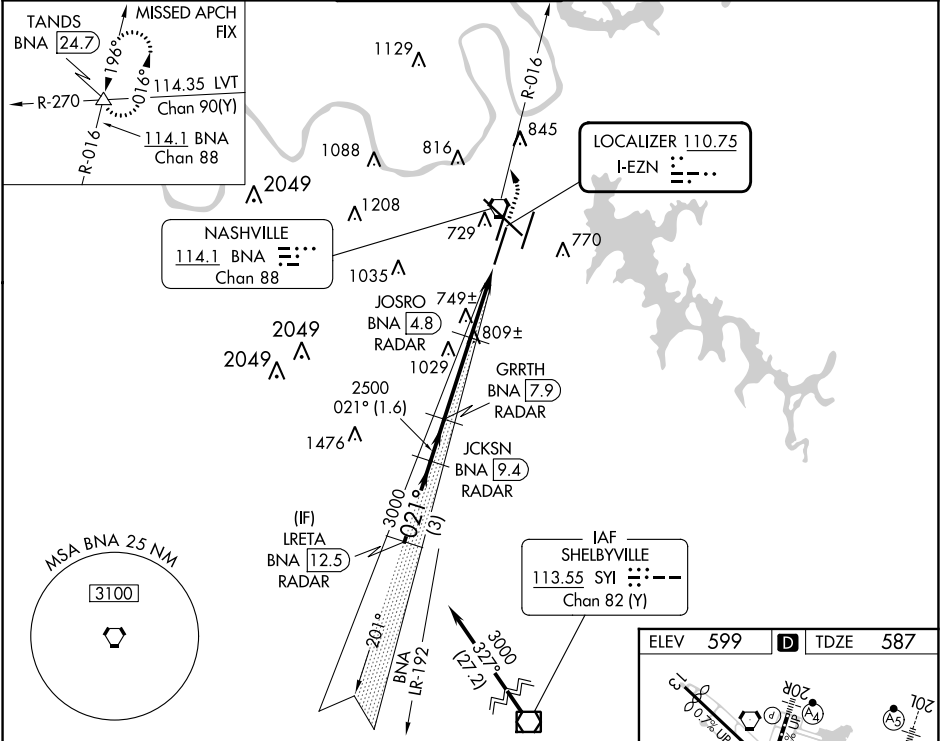

|            |                       |                       |                               |                               |
|------------|-----------------------|-----------------------|-------------------------------|-------------------------------|
| CATEGORY   | A                     | B                     | C                             | D                             |
| S-ILS 2C # |                       | 787/24                | 200 (200-1/2)                 |                               |
| S-LOC 2C   | 1000/24               | 413 (500-1/2)         | 1000/40                       | 413 (500-3/4)                 |
| CIRCLING   | 1100-1<br>501 (600-1) | 1120-1<br>521 (600-1) | 1200-1 3/4<br>601 (700-1 3/4) | 1380-2 1/2<br>781 (800-2 1/2) |

SE-1, 31 OCT 2024 to 28 NOV 2024

SE-1, 31 OCT 2024 to 28 NOV 2024