

LOC/DME I-LLH 111.55	APP CRS 265°	Rwy Idg TDZE Apt Elev	5001 36 36
Chan 52 (Y)			

ILS or LOC RWY 26

PHILADELPHIA INTL (PHL)

DME or RADAR required.


MAJRS

WIND For inop ALS, increase S-ILS all Cats visibility to RVR 4500 and S-LOC Cats A and B visibility to RVR 5500 and Cat C to 1 1/8 SM. Rwy 26 helicopter visibility reduction below RVR 4000 NA.

MALS

WIND MISSED APPROACH: Climb to 800 then climbing right turn to 3000 direct PTW VORTAC and hold.

D-ATIS ARR 133.4 DEP 135.925	PHILADELPHIA APP CON 124.35 319.15	PHILADELPHIA TOWER 118.5 327.05 (Rwys 9L/27R, 8/26 and 17/35) 135.1 327.05 (Rwy 9R/27L)	GND CON 121.9 348.6	CLNC DEL 118.85 348.6
--	--	---	-------------------------------	---------------------------------

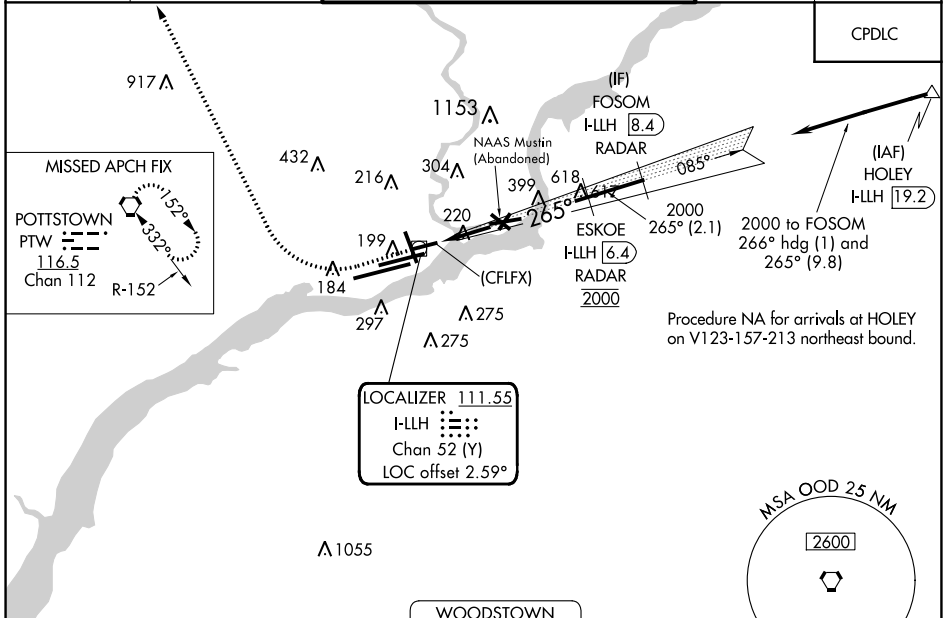

ELEV 36	D	TDZE 36
---------	----------	---------

TDZ/CL Rwy 9R
HIRL all Rwys
REIL Rwys 9L and 35

FAF to MAP 5.7 NM

Knots	60	90	120	150	180
Min:Sec	5:42	3:48	2:51	2:17	1:54

	800	3000	PTW
	*LOC only.		
	(CFLFX) I-LLH 0.6	*I-LLH 2.5	FOSOM I-LLH 8.4 RADAR
	2000	2000	2000
	1.8 NM	3.9 NM	2.1 NM
GS 3.15° TCH 50			
CATEGORY	A	B	C
S-ILS 26	299/40 263 (300-3/4)		
S-LOC 26	700/40	664 (700-3/4)	700-1 1/2 664 (700-1 1/2)
CIRCLING	700-1	664 (700-1)	700-1 7/8 664 (700-1 7/8)

NE-4, 31 OCT 2024 to 28 NOV 2024

NE-4, 31 OCT 2024 to 28 NOV 2024